


LFD Multi-Pallet Handlers

- Handles one or two pallets at a time
- Mechanically positioned inner forks
- Side shifting included, equal fork movement
- Loop-style 48" backrest standard
- Bolt-on mounting for easy installation

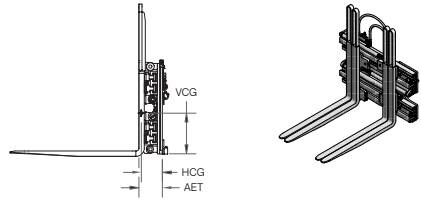

Sideshifting Single/Dual Pallet Handler, 2 Functions

Model Number	Capacity lb @ 24"	Fork Size W x L (in)	Inner Fork Range ITI	Outer Fork Range OTO	Fork Set Spacing OTO	Body Width (in)	Mounting Class	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
LFDA55SFC3365A	5,500	3 x 36	13.5-26	26-80	27	41	II or III	8.5	7.6	11.3	1,070
LFDA55SFC3425A	5,500	3 x 42							8.2	10.9	1,090
LFDA55SFC3325B	5,500	3 x 32	11-27	24-75	24	41	II or III	8.5	6.3	11.8	1,005
LFDA55SFC3365B	5,500	3 x 36							6.9	11.5	1,030
LFDA50SFC34255	5,000	3 x 42	16-30	28.3-87.3	28.5	43	II or III	8.5	8.1	11.0	1,115
LFDA50SFC34855	5,000	3 x 48							8.5	10.8	1,125
LFDA55SFC34255	5,500	3 x 42	16-30	28.3-87.3	28.5	43	II or III	8.5	8.1	11.0	1,115
LFDA55SFC34855	5,500	3 x 48							8.5	10.8	1,125
LFDA70SFC44270*	7,000	4 x 42	20-29	33-87	29	48	III	8.6	8.0	11.2	1,315
LFDA70SFC44870*	7,000	4 x 48							8.9	10.9	1,345

Single/Double/Triple Pallet Handler

LFT-55NS-FM332	5,500	3 x 32	Consult Factory	48	II or III	Consult Factory for Specifications and Price
----------------	-------	--------	-----------------	----	-----------	--

Capacities to 9,000 lb available; consult factory.

Specifications are with standard loop-type 48" high load backrest. Other load backrest options available, including tubular and interlocking.

*Outer fork widths on LFD-70 models are 4.0"; inner forks are 3.0" wide.

Recommended Hydraulic Supply

Model Number	Flow (gpm)	Recommended psi
All Models	7-10	2,500

Hydraulic flow less than minimum may reduce operating speed and/or cause irregular arm movement. Higher flow may result in heat build-up, erratic operation and shortened hydraulic system life.

Minimum Truck Carriage Width

Model Number	Body Width (in)	Minimum Truck Carriage Width (in)
LFD-5A/5B	41	38
LFD-55	43	38
LFD-70	48	43

Optional Load Backrests

Type	Height (in)
Loop	62
	72
	48
Interlocking	62
	72

Optional Mounting Hooks

	Description
Class II	Quick change hooks
Class III	Quick change hooks

Mounting other than shown, consult factory.

Installation Kits

Model Number	Number of Functions
YHJL-6-D-30	2
YHJL-8-D-30	

Includes the hoses and fittings to connect a standard attachment to the hose terminal on the lift truck carriage.

Industry Recommendations

Beverage Industry. The LFD-5B is suited for the general beverage applications. It provides the greatest ease of handling for pallets measuring 30" - 40". Optional interlocking backrest is available.

The Single/Double/Triple is designed for handling two or three 32" - wide beverage pallets and two 42" - or 44" - wide container pallets. This unit can be used in bottling or can plants or in the empty container vendor's operation. Contact factory for more details.

Food Industry. The LFD-55 and LFD-70 are ideal for handling GMA or CHEP® pallets. Fork set spacing and range permits handling of GMA pallets from both the 40" and 48" sides.

General Warehousing. The LFD-5A handles the widest variety of pallet sizes.