


Heavy-Duty Sideshifters

- Easy-on mounting – no welding
- Bronze top slides and caged, hardened steel lower heel rollers instead of plastic
- Predrilled for optional load backrest.
- Other models and sizes available – consult factory

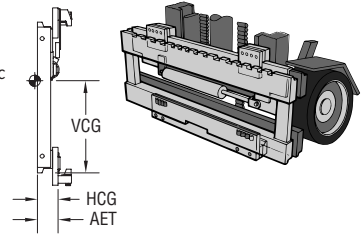

Class II, III, and IV, 1 Function

Model Number	Capacity lb @ 24"	Mounting Class	Width Range Available (in)	Total Sideshift (in) ¹	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
SLNC055A300 thru 420			30.0–42.0					140–182
SLNC055A421 thru 550	5,500	II	42.1–55.0	8	2.3	1.3	11.0	183–230
SLNC055A551 thru 720			55.1–72.0					231–395
SLNC100B400 thru 500			40.0–50.0					230–277
SLNC100B501 thru 600			50.1–60.0					278–340
SLNC100B601 thru 700	10,000	III	60.1–70.0	8	2.8	1.5	13.0	341–400
SLNC100B701 thru 800			70.1–80.0					401–450
SLNC155C400 thru 540			40.0–54.0					240–420
SLNC155C541 thru 700	15,500	IV	54.1–70.0	10	3.3	1.8	18.0	421–515
SLNC155C701 thru 800			70.1–80.0					516–565

¹ For sideshift widths greater than 14" over the truck's carriage width, consult factory. Replacement forks are available; see pages K-2 through K-5 for standard and specialty forks.

Load Backrest: ITA Class II, III, IV

See page B-10