


KTR Series Tissue Paper Roll Clamps

- Flared arms and All-Grip pads to avoid "bruising" soft tissue rolls
- Fixed short-arm models for ease of handling uniform roll diameters
- Positionable short-arm models for a wide range of roll diameters
- Up to 84" roll diameters; larger diameters available
- Position-controlled short arm movement

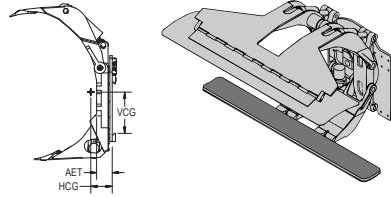

45" Diameter Tissue Rolls, 2 Functions

Model Number	Capacity (lb @ Roll Dia.)	Roll Range (in)	Short Arm	Contact Pad W x L (in)	Mount Class	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
KTR-25RN-F1645	2,500	14.5–43.5	Fixed	12 x 34	II				

60" Diameter Tissue Rolls, 2 Functions

NPR-360-FA4A	2,500	10–60	Fixed	15 x 54	II				
KTR-50RN-F2460	5,000	24–60	Fixed	18 x 80	III or IV				
KTR-50RN-P1060		10–60	Positionable						
KTR-75RN-F2660	7,500	26–60	Fixed	18 x 48	III or IV				
KTR-75RN-F1060		10–60	Positionable						

72" Diameter Tissue Rolls, 2 Functions

KTR-60RN-F3072	6,000	30–72	Fixed	18 x 48	III				
KTR-60RN-P1272		12–72	Positionable						
KTR-70RN-F3072	7,000	30–72	Fixed	18 x 60	III or IV				
KTR-70RN-P1272		12–72	Positionable						

80" Diameter Tissue Rolls, 2 Functions

KTR-54RN-F4080	5,400	40–80	Fixed	14 x 60	III or IV				
KTR-54RN-P2380		23–80	Positionable						

84" Diameter Tissue Rolls, 2 Functions

KTR-50RN-F4284	5,000	42–84	Fixed	18 x 48	III or IV				
KTR-50RN-P2884		28–84	Positionable						
KTR-70RN-F4284	7,000	42–84	Fixed	18 x 60	IV				
KTR-70RN-P2884		28–84	Positionable						

Installation Equipment

Model Number	Item
YHJL-6-D-30 ¹	Jump lines: 2 functions, #6 hose
YHJL-8-D-30 ¹	Jump lines: 2 functions, #8 hose
YHJL-6-T-30 ¹	Jump lines: 3 functions, #6 hose
YHJL-8-T-30 ¹	Jump lines: 3 functions, #8 hose
YL-279	Single-setting relief valve
YL-354	Three-position relief valve
2520877	Pressure gauge
YSVK-1	Solenoid installation kit: 2 functions note: solenoid kits do not include any electrical adaptation for trucks.
Y088122.1	Control knob: 2 functions (1 button)
2527912	Set of 2 quick disconnect hydraulic couplings ²

¹ Includes the hoses and fittings to connect a standard attachment to the hose terminal on the lift truck carriage.

² See page J-3 for more information on quick disconnect coupling kits.

³ See page D-11 for optional features.