


LCP/NSQ Pulp Bale Clamps

- ▶ Clean, grease-free handling – no lubrication required
- ▶ Internal sideshift for maneuverability
- ▶ Thin arm design for easier entry between stacks
- ▶ For All-in-One Clamp, see Page D-15

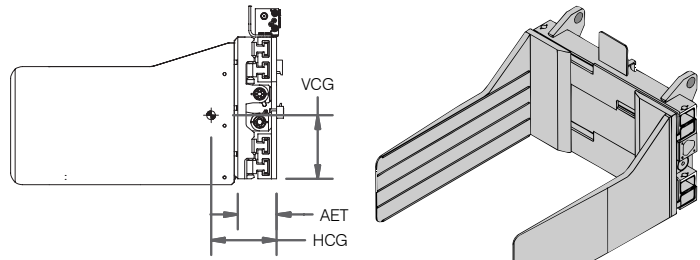

Sideshifting Pulp Bale Clamps, 2 Functions

| Model Number | Capacity lb @ L.C. | Opening Range (in) | Body Width (in) | Arm Size H x L (in) | Lost Load AET (in) | HCG (in) | VCG (in) | Mounting Class | Weight (lb) |
|----------------|-----------------------|-----------------------|--------------------|------------------------|-----------------------|--------------------|--------------------|-------------------|-------------|
| LCP-44NS-P1827 | | 22.8–77.1 | | 18 x 27 | 5.0 | 7.0 | 9.8 | | 851 |
| LCP-44NS-P1848 | | 22.3–76.6 | 41 | 18 x 48 | 5.0 | 13.8 | 9.5 | II or III | 1,150 |
| LCP-44NS-P4824 | 4,400 | 22.8–77.1 | | 48 x 24 | 5.0 | 9.8 | 17.0 | | 997 |
| LCP-4CNS-P1827 | lb @ 24" | 22.8–84.1 | | 18 x 27 | 5.0 | 6.5 | 9.7 | | 939 |
| LCP-4CNS-P1848 | | 22.3–83.6 | 48 | 18 x 48 | 5.0 | 13.0 | 9.6 | II or III | 1,237 |
| LCP-4CNS-P4824 | | 22.8–84.1 | | 48 x 24 | 5.0 | 9.3 | 16.5 | | 1,085 |
| LCP-55NS-P1827 | | 22.8–76.5 | | 18 x 27 | 5.5 | 6.4 | 9.8 | | 985 |
| LCP-55NS-P1848 | | 22.3–76.0 | 41 | 18 x 48 | 5.5 | 12.6 | 9.6 | III | 1,282 |
| LCP-55NS-P4824 | 5,500 | 22.8–76.5 | | 48 x 24 | 5.5 | 9.0 | 16.2 | | 1,130 |
| LCP-5CNS-P1827 | lb @ 24" | 22.8–83.5 | | 18 x 27 | 5.5 | 6.0 | 9.8 | | 1,095 |
| LCP-5CNS-P1848 | | 22.3–83.0 | 48 | 18 x 48 | 5.5 | 11.8 | 9.6 | III | 1,393 |
| LCP-5CNS-P4824 | | 22.8–83.5 | | 48 x 24 | 5.5 | 8.4 | 15.6 | | 1,241 |
| NSQ-75NS-P1540 | | | | 15 x 40 | 9.6 ¹ | 8.8 | 11.6 | | 1,875 |
| NSQ-75NS-P1548 | 7,500 | 22–74 | 50 | 15 x 48 | 9.6 ¹ | 12.3 | 10.8 | III | 2,095 |
| NSQ-7ANS-P1540 | lb @ 35" | | | 15 x 40 | 9.6 ¹ | 9.6 | 11.3 | | 2,175 |
| NSQ-7ANS-P1548 | | 22–90 | 62 | 15 x 48 | 9.6 ¹ | 11.4 | 11.3 | III | 2,395 |
| NSQ-88NS-P2048 | | | | 20 x 48 | 9.6 ¹ | 14.2 | 12.5 | | 2,685 |
| NSQ-88NS-P2055 | 8,800 | 22–76 | 50 | 20 x 55 | 9.6 ¹ | 16.6 | 11.9 | IV | 2,850 |
| NSQ-8ANS-P2048 | lb @ 35" | | | 20 x 48 | 9.6 ¹ | 12.8 | 12.6 | | 3,050 |
| NSQ-8ANS-P2055 | | 22–90 | 62 | 20 x 55 | 9.6 ¹ | 14.0 | 11.8 | IV | 3,230 |
| NSQ-11NS-P2048 | | | | 20 x 48 | 10.3 ¹ | 11.3 | 13.6 | | 3,060 |
| NSQ-11NS-P2055 | | 25–84 | 52 | 20 x 55 | 10.3 ¹ | 13.1 | 12.9 | IV | 3,125 |
| NSQ-11NS-P4848 | 11,000 | | | 48 x 48 | 10.3 ¹ | 15.0 | 15.8 | | 3,678 |
| NSQ-11NS-P4856 | lb @ 35" | 25–91 | 58 | 48 x 56 | 10.3 ¹ | 19.4 | 17.4 | | 4,875 |
| NSQ-1ANS-P2048 | | | | 20 x 48 | 10.3 ¹ | 10.5 | 13.6 | | 3,425 |
| NSQ-1ANS-P2055 | | 34–110 | 64 | 20 x 55 | 10.3 ¹ | 11.7 | 13.0 | IV | 3,505 |
| NSQ-17NS-P2055 | 17,000 | | | 20 x 55 | Consult Factory | Consult Factory | Consult Factory | Pin | 4,895 |
| NSQ-17NS-P2063 | lb @ 35" | 24–120 | 96 | 20 x 63 | Consult Factory | Consult Factory | Consult Factory | Pin | 5,050 |
| NSQ-20NS-P3055 | 20,000 | | | 30 x 55 | Consult Factory | Consult Factory | Consult Factory | Pin | 6,850 |
| NSQ-20NS-P3063 | lb @ 35" | 28–158 | 125 | 30 x 63 | Consult Factory | Consult Factory | Consult Factory | Pin | 7,080 |

¹ NSQ AET measured to heel.

Recommended Hydraulic Supply

| Model Number | Flow (gpm) | Max psi |
|-----------------|------------|---------|
| LCP-44NS / 5CNS | 7–10 | 2,500 |
| NSQ-75NS / 1ANS | 9–15 | 2,250 |
| NSQ-17NS / 20NS | 15–18 | 2,250 |

Hydraulic flow less than minimum may reduce operating speed and/or cause irregular arm movement. Higher flow may result in heat build-up, erratic operation and shortened hydraulic system life.