


Gaylord Clamps

- Handles bulk box containers
- Capacities from 3,500 to 5,000
- Clean, grease-free handling — no lubrication required

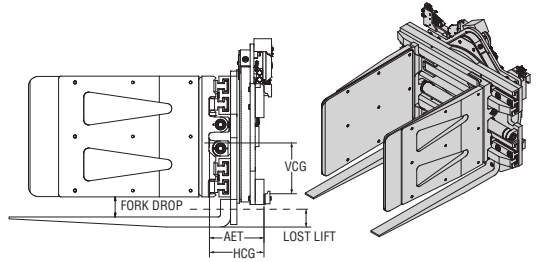

Gaylord Clamps

Model Number	Capacity	Opening Range	Arm Height	Arm/ Fork Usable Length	Fork Size	Fork Out-to-Out	Fork Drop	Lost Lift	Mounting Class	Mounting Angle	AET	HCG	VCG	WT
LCS-35-RN-A2436	3,500	19.0-70.0	24	36	1.5 x 4.0	22.0	6.0	7.5	II	0	10.9	11.5	7.3	1830
LCS-35-RN-A2436	3,500	19.0-70.0	24	36	1.5 x 4.0	22.0	6.0	7.5	III	0	12.6	12.4	7.8	1980
LCS-35-RN-A2442	3,500	19.0-70.0	24	42	1.5 x 4.0	22.0	6.0	7.5	II	0	10.9	14.2	7.3	1985
LCS-35-RN-A2442	3,500	19.0-70.0	24	42	1.5 x 4.0	22.0	6.0	7.5	III	0	12.6	15.0	7.7	2195
LCS-35-RN-A2448	3,500	19.0-70.0	24	48	1.5 x 4.0	22.0	6.0	7.5	II	0	10.9	16.9	7.2	2140
LCS-35-RN-A2448	3,500	19.0-70.0	24	48	1.5 x 4.0	22.0	6.0	7.5	III	0	12.6	17.7	7.6	2350
LCS-50-RN-A2442	5,000	22.0-76.0	24	42	2.0 x 5.0	30.0	6.0	5.5	II/III	0	10.9	13.7	9.2	2300

Other pad and fork sizes/spreads available. Consult factory for details.

Options

Item
Modified opening ranges
Load backrest
Pad sizes
Class II quick change lower hooks
Class III quick change lower hooks
Pressure gauge
Pressure relief valve
Fork lengths
Fork spread
Distance between fork and arm

Recommended Hydraulic Supply

Model Number	Flow (gpm)	Max psi
All Models	12	2,500

Hydraulic flow less than minimum may reduce operating speed and/or cause irregular arm movement. Higher flow may result in heat build-up, erratic operation and shortened hydraulic system life.

Minimum Truck Carriage Width

Model Number	Body Width (in)	Minimum Truck Carriage Width (in)
LCS-35RN	41	29
LCS-50RN	41	33