


LCC Adjust-a-Force™ Carton Clamps

- ▶ Clean, grease-free handling, patented Repair-in-Place serviceability
- ▶ Provides “soft touch” to handle the most delicate products
- ▶ Exclusive spring plate arms distribute force evenly over load support area

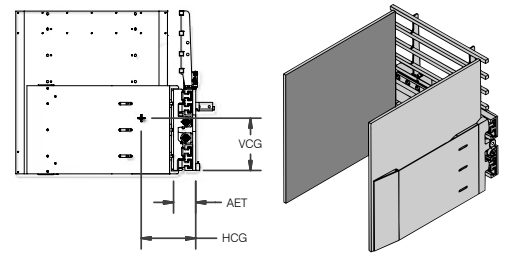

Sideshifting Carton Clamps, 2 Functions

Model Number	Capacity lbs @ LC (in)	Opening Range (in)	Arm Size L x H (in)	Mounting Class	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
LCC-25NS-S4048	2,500 @ 20	21.0–75.5	40 x 48	II	5.0	13.0	13.6	1,181
LCC-25NS-S4248	2,500 @ 21		42 x 48			13.5	13.7	1,200
LCC-25NS-S4648	2,500 @ 23		46 x 48			14.3	13.8	1,228
LCC-25NS-S4848	2,500 @ 24		48 x 48			15.5	13.8	1,294
LCC-35NS-S4048	3,500 @ 20	21.0–75.5	40 x 48	II	5.0	12.6	13.5	1,223
LCC-35NS-S4248	3,500 @ 21		42 x 48			13.1	13.5	1,242
LCC-35NS-S4648	3,500 @ 23		46 x 48			13.9	13.7	1,270
LCC-35NS-S4848	3,500 @ 24		48 x 48			15.1	13.7	1,336
LCC-35NS-S5248	3,230 @ 26	21.0–75.5	52 x 48	II	5.0	16.0	13.8	1,364
LCC-35NS-S5448	3,110 @ 27		54 x 48			1.0	13.8	1,490
LCC-35NS-S4054	3,500 @ 20		40 x 54			13.2	14.5	1,255
LCC-35NS-S4254	3,500 @ 21		42 x 54			13.8	14.6	1,275
LCC-35NS-S4654	3,500 @ 23	21.0–75.5	46 x 54	II	5.0	14.6	14.9	1,310
LCC-35NS-S4854	3,500 @ 24		48 x 54			15.6	14.9	1,375
LCC-35NS-S5254	3,230 @ 26		52 x 54			16.5	15.0	1,407
LCC-35NS-S5454	3,110 @ 27		54 x 54			18.5	15.0	1,534
LCC-35NS-S4060	3,500 @ 20	21.0–75.5	40 x 60	II	5.0	13.3	15.6	1,288
LCC-35NS-S4260	3,500 @ 21		42 x 60			13.9	15.8	1,310
LCC-35NS-S4660	3,500 @ 23		46 x 60			14.8	16.1	1,345
LCC-35NS-S4860	3,500 @ 24		48 x 60			16.0	16.1	1,415
LCC-35NS-S5260	3,230 @ 26	21.0–75.5	52 x 60	II or III	5.0	17.0	16.3	1,450
LCC-35NS-S5460	3,110 @ 27		54 x 60			18.9	16.3	1,580
LCC-50NS-S4248	5,000 @ 21		42 x 48			13.0	13.5	1,265
LCC-50NS-S4648	5,000 @ 23		46 x 48			13.7	13.6	1,295
LCC-50NS-S4848	5,000 @ 24	21.0–75.5	48 x 48	II or III	5.0	14.9	13.6	1,360
LCC-50NS-S4060	5,000 @ 20		40 x 60			13.2	15.5	1,316
LCC-50NS-S4260	5,000 @ 21		42 x 60			13.7	15.7	1,334
LCC-50NS-S4660	5,000 @ 23		46 x 60			14.6	16.0	1,369
LCC-50NS-S4860	5,000 @ 24	48 x 60	15.8	16.0	1,438			



Lower Mounting Hooks

Model Number	Mounting Class	Angle (°)	Description
ANO	II	0	Bolt-On
AQ0			Quick Change
BN0	III	0	Bolt-On
BQ0			Quick Change



Minimum Truck Carriage Width

Model Number	Body Width (in)	Minimum Truck Carriage Width (in)
LCC-25 / 35 / 50	41	35



Installation Kits

Model Number	Number of Functions
YHJL-6-D-30	2
YHJL-8-D-30	

Includes the hoses and fittings to connect a standard attachment to the hose terminal on the lift truck carriage.



Recommended Hydraulic Supply

Model Number	Flow (gpm)	Max psi
All Models	7–9	2,500

Hydraulic flow less than minimum may reduce operating speed and/or cause irregular arm movement. Higher flow may result in heat build-up, erratic operation and shortened hydraulic system life.