


## SQ-CP Series Concrete Pipe Clamps

- Powered pads and integral mounting available
- Handles pipe in vertical position
- Handles cured or green pipe

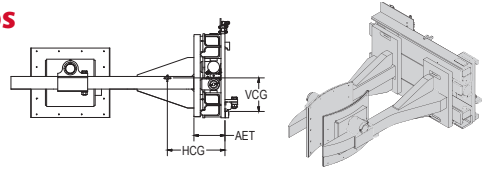

### Non-Sideshifting Models, 1 Function

Model Number	Capacity lb @ LC (in)	Opening Range (in)	Pad Size W x H (in)	Class	Mounting Angle (°)	Weight (lb)
SQ-3-CP	3,200 @ 30	9-50	18 x 18	III		1,900
SQ-8-CP	5,500 @ 36	18-72	20 x 24	III or IV		2,520
SQ-12-CP	6,500 @ 44	17.5-85	24 x 24	IV	0	3,850
SQ-20-CP	10,000 @ 48	33.5-92	24 x 24	Pin/integral <sup>1</sup>		6,200
SQ-30-CP	12,000 @ 60	25-125	24 x 24	Pin/integral <sup>1</sup>		9,150

<sup>1</sup> Pin/integral mounting included in price.


### Recommended Hydraulic Supply

Model Number	Flow (gpm)	Max psi
SQ3/SQ8	7-10	2,000
SQ12	9-15	2,000
SQ20/SQ30	Consult Factory	2,000

Hydraulic flow less than minimum may reduce operating speed and/or cause irregular arm movement. Higher flow may result in heat build-up, erratic operation and shortened hydraulic system life.

## NPR-CP Series Concrete Pipe Clamps

- Minimum lost load for best net truck capacity
- Safely lay pipe down in the bilge position
- Rubber-faced contact pads standard
- Pin/Integral mounting available

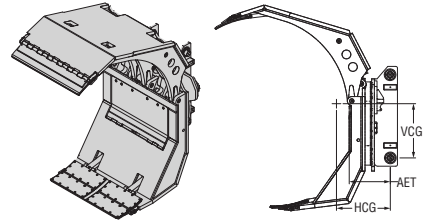

### 360° Rotating Models, 2 Functions

Model Number	Capacity lb @ LC (in)	Opening Range (in)	Pad Size W x H (in)	Mounting Class	Angle (°) <sup>1</sup>	Weight (lb)
NPRCP-652B	6,000 @ 26	10-52	10 x 30	III	0	1,990
NPRCP-760C	7,000 @ 30	10-60				3,300
NPRCP-1060C	10,000 @ 30	10-60	12 x 42	IV	0	3,450
NPRCP-980C	9,000 @ 40	22-80				
NPRCP-1888S	18,000 @ 44	34-88	12 x 42	IV	0	4,615
NPRCP-225102S	22,500 @ 51	34-102				
NPRCP-29116S	29,000 @ 58	41-116				
NPRCP-3090	30,000 @ 45	35-90				
NPRCP-32102	32,000 @ 51	33-102	20 x 54			
NPRCP-35130	35,000 @ 65	75-130				

Consult factory for specifications and price

### Recommended Hydraulic Supply

Model Number	Flow (gpm)	Max psi
NPRCP-652/760	12	2,000
NPRCP-980/1060	24	2,000
NPRCP-1888 thru 35130	Consult factory	

Hydraulic flow less than minimum may reduce operating speed and/or cause irregular arm movement. Higher flow may result in heat build-up, erratic operation and shortened hydraulic system life.