


Hook-to-Pin Sideshifters

- Easily reposition forks
- Solid bronze, bolt-on top sliding hooks
- Caged, hardened steel heel roller assembly
- Any width available, including jump sizes; consult factory

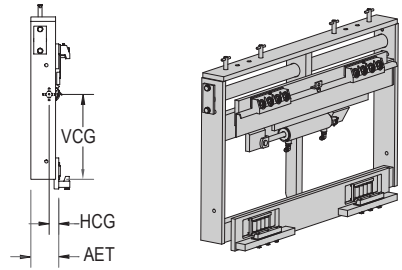

Class II, III, and IV, 1 Function

Model Number	Capacity lb @ 24"	Mounting Class	Overall Width (in)	Min. Truck Carriage Width (in)	Fork Spread ITO (in) ¹	Total Sideshift (in)	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
SPNC055A375			37.5	35	1.5-36					260
SPNC055A395			39.5	35	1.5-38					270
SPNC055A425	5,500	II	42.5	35	1.5-41	8	2.9	2.0	14.4	285
SPNC055A455			45.5	41	1.5-44					310
SPNC055A515			51.5	41	1.5-50					330
SPNC100B420			42	36	2-40					375
SPNC100B480			48	40	2-46					410
SPNC100B500	10,000	III	50	40	2-48	8	2.9	2.1	15.1	420
SPNC100B600			60	48	2-58					480
SPNC100B620			62	48	2-60					490
SPNC155C440			44	42	2-42					650
SPNC155C500			50	48	2-48					735
SPNC155C540	15,500	IV	54	48	2-52	10	3.2	2.6	22.0	775
SPNC155C620			62	48	2-60					855
SPNC155C740			74	65	2-72					975

¹ Minimum fork spread range is to inside of forks. Maximum fork spread range is to outside of forks.

Notes: For fork-pin profiles, see pin-to-pin graphic on page B-10.