


# LCC Articulating Arm Carton Clamps

- ▶ Thin-arm profile along the entire arm allows ease of entry
- ▶ For tight breakout situations; ideal for handling appliances
- ▶ Clean, grease-free handling; Repair-in-Place serviceability
- ▶ Sideshift improves productivity

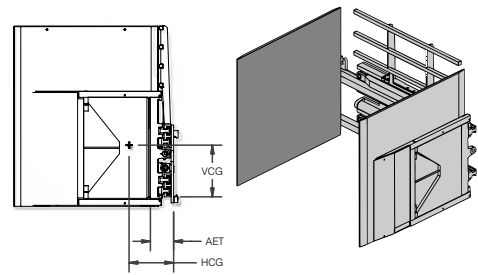

## Sideshifting Carton Clamps, 2 Functions

Model Number	Capacity lbs @ LC (in)	Opening Range (in)	Arm Size L x H (in)	Mounting Class	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
LCC-15NS-B3048	1,500 @ 15		30 x 48			8.3	14.4	1,130
LCC-15NS-B4048	1,500 @ 20		40 x 48			11.2	14.5	1,280
LCC-15NS-B4248	1,500 @ 21		42 x 48			11.9	14.6	1,320
LCC-15NS-B4448	1,500 @ 22	22-76	44 x 48	II	5.0	12.5	14.6	1,355
LCC-15NS-B4648	1,500 @ 23		46 x 48			13.2	14.6	1,390
LCC-15NS-B4848	1,500 @ 24		48 x 48			13.7	14.5	1,410
LCC-15NS-B5448	1,500 @ 27		54 x 48			15.9	14.6	1,535
LCC-2ANS-B4048	2,500 @ 20		40 x 48			10.1	13.6	1,250
LCC-2ANS-B4248	2,500 @ 21		42 x 48			10.7	13.7	1,280
LCC-2ANS-B4448	2,500 @ 22	19-65	44 x 48	II	5.0	11.3	13.7	1,309
LCC-2ANS-B4648	2,500 @ 23		46 x 48			11.9	13.8	1,339
LCC-2ANS-B4848	2,500 @ 24		48 x 48			12.5	13.8	1,369
LCC-25NS-B3048	2,500 @ 15		30 x 48			8.3	14.4	1,135
LCC-25NS-B4048	2,500 @ 20		40 x 48			11.2	14.5	1,285
LCC-25NS-B4248	2,500 @ 21		42 x 48			11.9	14.6	1,325
LCC-25NS-B4448	2,500 @ 22	22-76	44 x 48	II	5.0	12.5	14.6	1,360
LCC-25NS-B4648	2,500 @ 23		46 x 48			13.2	14.6	1,395
LCC-25NS-B4848	2,500 @ 24		48 x 48			13.7	14.5	1,415
LCC-25NS-B5448	2,220 @ 27		54 x 48			15.9	14.6	1,540
LCC-35NS-B4048	3,500 @ 20		40 x 48			10.7	14.1	1,451
LCC-35NS-B4248	3,500 @ 21		42 x 48			11.3	14.1	1,488
LCC-35NS-B4448	3,100 @ 22	22-76	44 x 48	II or III	5.0	12.0	14.2	1,525
LCC-35NS-B4648	3,500 @ 23		46 x 48			12.6	14.2	1,562
LCC-35NS-B4848	3,500 @ 24		48 x 48			13.3	14.3	1,599
LCC-35NS-B5448	3,110 @ 27		54 x 48			15.2	14.4	1,710

## Lower Mounting Hooks

Model Number	Mounting Class	Angle (°)	Description
ANO	II	0	Bolt-On
AQ0			Quick Change
BNO	III	0	Bolt-On
BQ0			Quick Change

## Minimum Truck Carriage Width

Model Number	Body Width (in)	Minimum Truck Carriage Width (in)
LCC-2A	36	30
LCC-25 /35	41	35

## Installation Kits

Model Number	Number of Functions
YHJL-6-D-30	
YHJL-8-D-30	2

Includes the hoses and fittings to connect a standard attachment to the hose terminal on the lift truck carriage.

## Recommended Hydraulic Supply

Model Number	Flow (gpm)	Max psi
All Models	7-9	2,500

Hydraulic flow less than minimum may reduce operating speed and/or cause irregular arm movement. Higher flow may result in heat build-up, erratic operation and shortened hydraulic system life.