


- ▶ Designed for breweries, distribution centers and distributors
- ▶ Supplying quality Coors™ Push/Pulls for over two decades
- ▶ All models feature solid platen for full support of load

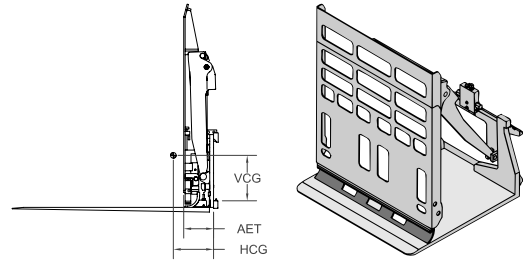

Distributor Units: Non-Sideshifting, 1 Function

Model Number	Capacity lb @ 24"	Mounting Class	Push Stroke (in)	Platen Size, W x L (in)	Push Plate W x H (in)	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
FMP-45NN-SG146		Fork Mount.	48		40 x 50	6.0	13.9	10.8	825
PLP-45NN-SC146-CD1		II	48	40 x 46 solid	40 x 50	6.8	8.5	9.6	1,295
PLP-45NN-SC146-CD2	4,500	II	48		40 x 50 ²	7.5	7.8	9.6	1,465
PLP-50NN-SC146-CD3		II	48 ¹		40 x 50	7.8	8.3	10.4	1,550
PLP-50NN-SC146-CD4		II	48 ¹		40 x 50 ²	7.8	8.2	10.4	1,625

48" Push stroke with manual stops at 41".

Hinged torsion-style push plate: Facilitates loading into delivery truck bays.

FMP Mounting Requirements

FMP must mount to forks of lift truck for supporting load handled and push/pull. Recommended fork length is 6" less than platen length. Forks up to 1 3/4" thick and 5" wide and spaced 27" center to center are required. Contact factory for mounting information should different conditions exist.

Optional Mounting Hooks

Model Number	Class	Description
PLP-45	II	Quick Change
PLP-50	II	Quick Change
PLP-45	III	Bolt-On
	III	Quick Change
PLP-50	III	Bolt-On
	III	Quick Change

Recommended Hydraulic Supply

Model Number	Flow (gpm)	Max psi
FMP	5-7	2,300
PLP-45	7-8	2,200
PLP-50	9-12	2,300

Hydraulic flow less than minimum may reduce operating speed and/or cause irregular arm movement. Higher flow may result in heat build-up, erratic operation and shortened hydraulic system life.

Installation Kits

Model Number	Number of Functions
YHJL-6-S-30	1
YHJL-8-S-30	
YHJL-6-D-30	2
YHJL-8-D-30	

Includes the hoses and fittings to connect a standard attachment to the hose terminal on the lift truck carriage.