


# Coors™

- Designed for breweries, distribution centers and distributors
- Supplying quality Coors™ push/pulls for over two decades
- All models feature solid platen for full support of load

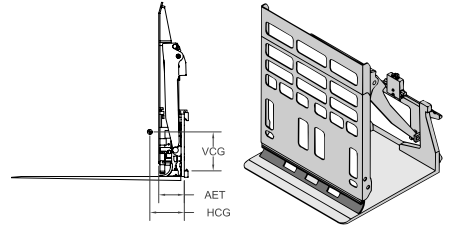

## Distributor Units: Non-Sideshifting, 1 Function

Model Number	Capacity lb @ 24"	Mounting Class	Push Stroke (in)	Platen Size, W x L (in)	Push Plate W x H (in)	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
PLP-45NN-SC146-CD1	4,500	II	48	40 x 46 solid	40 x 50	6.8	8.5	9.6	1,295
PLP-45NN-SC146-CD2		II	48		40 x 50 <sup>2</sup>	7.5	7.8	9.6	1,465
PLP-50NN-SC146-CD3		II	48 <sup>1</sup>		40 x 50	7.8	8.3	10.4	1,550
PLP-50NN-SC146-CD4		II	48 <sup>1</sup>		40 x 50 <sup>2</sup>	7.8	8.2	10.4	1,625

<sup>1</sup> 48" push stroke with manual stops at 41".

<sup>2</sup> Hinged torsion-style push plate: Facilitates loading into delivery truck bays.

## Recommended Hydraulic Supply

Model Number	Flow (gpm)	Max psi
PLP-45	7-8	2,200
PLP-50	9-12	2,300

Hydraulic flow less than minimum may reduce operating speed and/or cause irregular arm movement. Higher flow may result in heat build-up, erratic operation and shortened hydraulic system life.

## Minimum Truck Carriage Width

Model Number	Minimum Truck Carriage Width (in)
All PLP 35/45 Models	27
PLP500/PLP5500	32/39
PLP62/PLP62	32/39
PLP80/PLP80	37/39
LP500/LP5500	32/39
LP62/LP62	32/39
LP80/LP80	37/39

## Optional Mounting Hooks

Model Number	Class	Description
PLP-45	II	Quick Change
PLP-50	II	Quick Change
PLP-45	III	Bolt-On
	III	Quick Change
PLP-50	III	Bolt-On
	III	Quick Change

## Installation Kits

Model Number	Number of Functions
YHJL-6-S-30	1
YHJL-8-S-30	
YHJL-6-D-30	2
YHJL-8-D-30	

Includes the hoses and fittings to connect a standard attachment to the hose terminal on the lift truck carriage.