
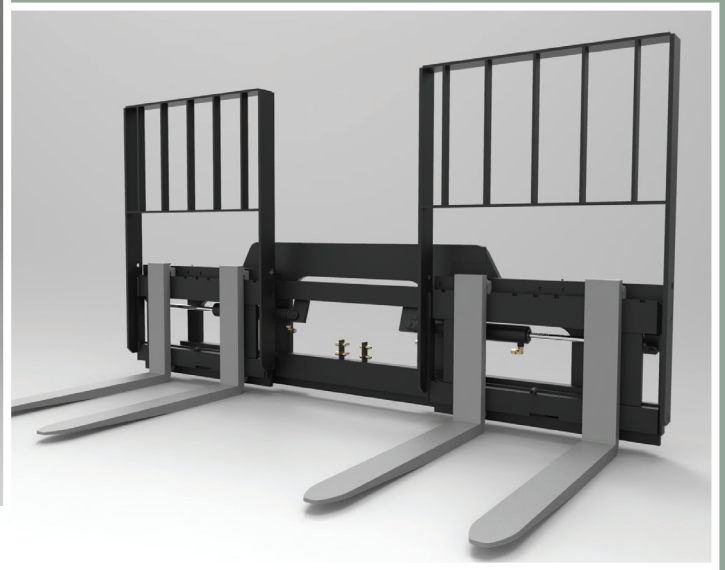


## Long Reach Dual Sideshifters

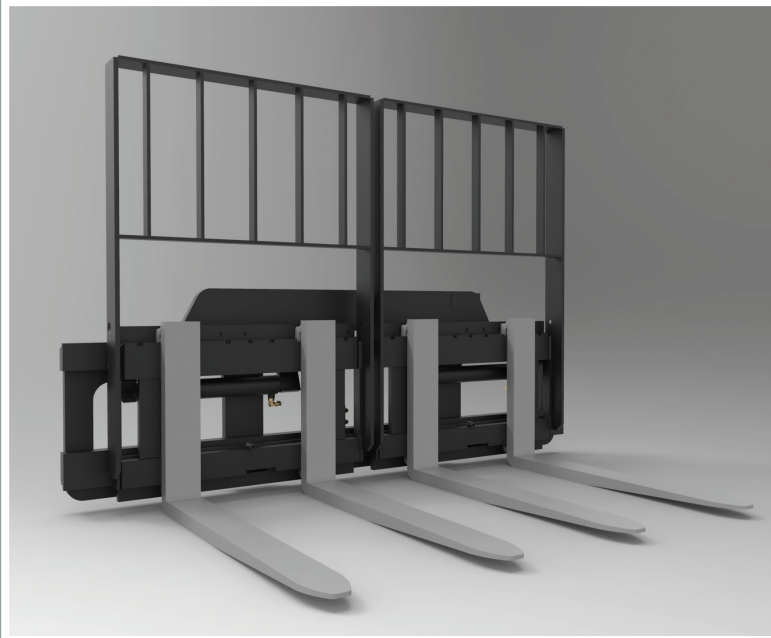

### **Quickly handle two pallets at once with one lift truck and one driver**

Increase lift truck productivity by efficiently handling multiple pallets, with a Long Reach dual sideshift attachment. Designed to lift and shift adjacent pallets, then place them together or spread them against trailer walls, these hardworking attachments offer faster cycle times and reduced potential for damage.

No-weld installation gives your lift truck versatility. Sturdy bronze sideshift hooks and caged steel heel rollers extend the maintenance cycle.

### **Faster cycle times**

A dual sideshifter permits lateral positioning of fixed fork pairs or the load without repositioning the truck. Operators can make faster approaches with a minimum of maneuvering to spot the load. That means faster cycle times.


### **Models to match any application or need**

Dual sideshifters are ideal for typical warehousing and production operations, or for loading/unloading situations.

- Up to 10,000 lb capacity
- Caged, hardened steel rollers
- Large bronze top slides
- No-weld installation

## Dual Sideshifters

- ◆ Includes load backrest
- ◆ Individual sideshifting for each pallet
- ◆ Minimal AET to maximize net truck capacity
- ◆ Uses heavy-duty sideshifter design
- ◆ Bronze top slide
- ◆ Hardened steel lower heel rollers

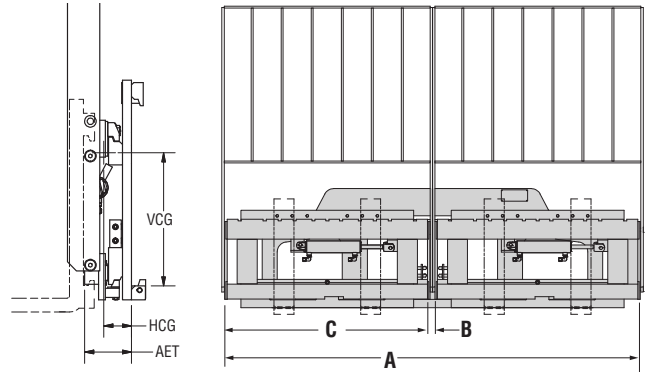

## Class II, III and IV, 1 or 2 Function

Model Number	Total Capacity lbs @ 24"	Truck Mtg. Class <sup>1</sup>	Min. Truck Carriage Width (in)	A OAW Min.-Max. (in)	B Center Spacing (in)	C Front Carr. Width (in)	Base Frame Width (in)	SS Stroke Each (in)	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
SDNC055A08337			36	75-83	0-9 <sup>2</sup>	37	69	8.0	4.3	2.6		725
SDNC055A09131			31	64-91	2-29	31	68	13.5	4.5	2.6		765
SDNC055A09141	5,500	II or III	36	83-91	0-9 <sup>2</sup>	41	73	8.0	4.3	2.6	12.5	785
SDNC055A09531			31	68-95	6-33	31	72	13.5	4.5	2.6		790
SDNC055A09931			31	71-98	9-36	31	75	13.5	4.5	2.6		805
SDNC100B08337 <sup>3</sup>			38	75-83		37	69					775
SDNC100B09141 <sup>3</sup>	10,000	III or IV	38	83-91	0-9 <sup>2</sup>	41	73	8.0	4.5	2.6	14.0	835
SDNC100B10146 <sup>3</sup>			38	93-101		46	78					875

<sup>1</sup> Truck mounting class to be specified at time of order.

<sup>2</sup> For B = 0 - 9", front carriage will shift past center by 3.5"

<sup>3</sup> Not available with Class IV fork bars.

Replacement forks are available; see pages K-2 through K-5 for standard and specialty forks.

## Choose Long Reach for serviceability, value, and custom design

Multi-Pallet Handlers  
Fork Positioners  
Integral Carriages  
Paper Roll Clamps  
Lateral Clamps

Carton Clamps  
Push-Pulls  
Rotators  
Custom Design

21433 SW Oregon Street  
Sherwood, Oregon 97140-9799 USA  
Toll free: (800) 285-7000  
Phone: (503) 625-2560  
Fax: (503) 625-7269

Email: [marketing@alliedsystems.com](mailto:marketing@alliedsystems.com)  
[www.alliedsystems.com/Longreach](http://www.alliedsystems.com/Longreach)

**LONG REACH**<sup>®</sup>  
A Division of Allied Systems Company