

Fire Detection System, Auto


Fire Detection System, Auto

Item	Part No.	Qty	Description	Item	Part No.	Qty	Description
	594830		Fire Detection System Auto				
1	-----	1	. Cable, Linear Detector	8	302400W	3	. Locknut
2	-----	46	. Sleeve, Rubber	9	R13809366	3	. Capscrew
3	-----	1	. Connector, Eol Device	10	-----	1	. Cable, Linear Detector
4	595326	44	. Mount, Tack				
5	249329	47	. Cable Tie, Dbl Loop				
6	R13803021	3	. Clip, Insul				
7	296418W	6	. Hard Washer				


Fire Suppression System should be serviced
by an authorized ANSUL service technician.

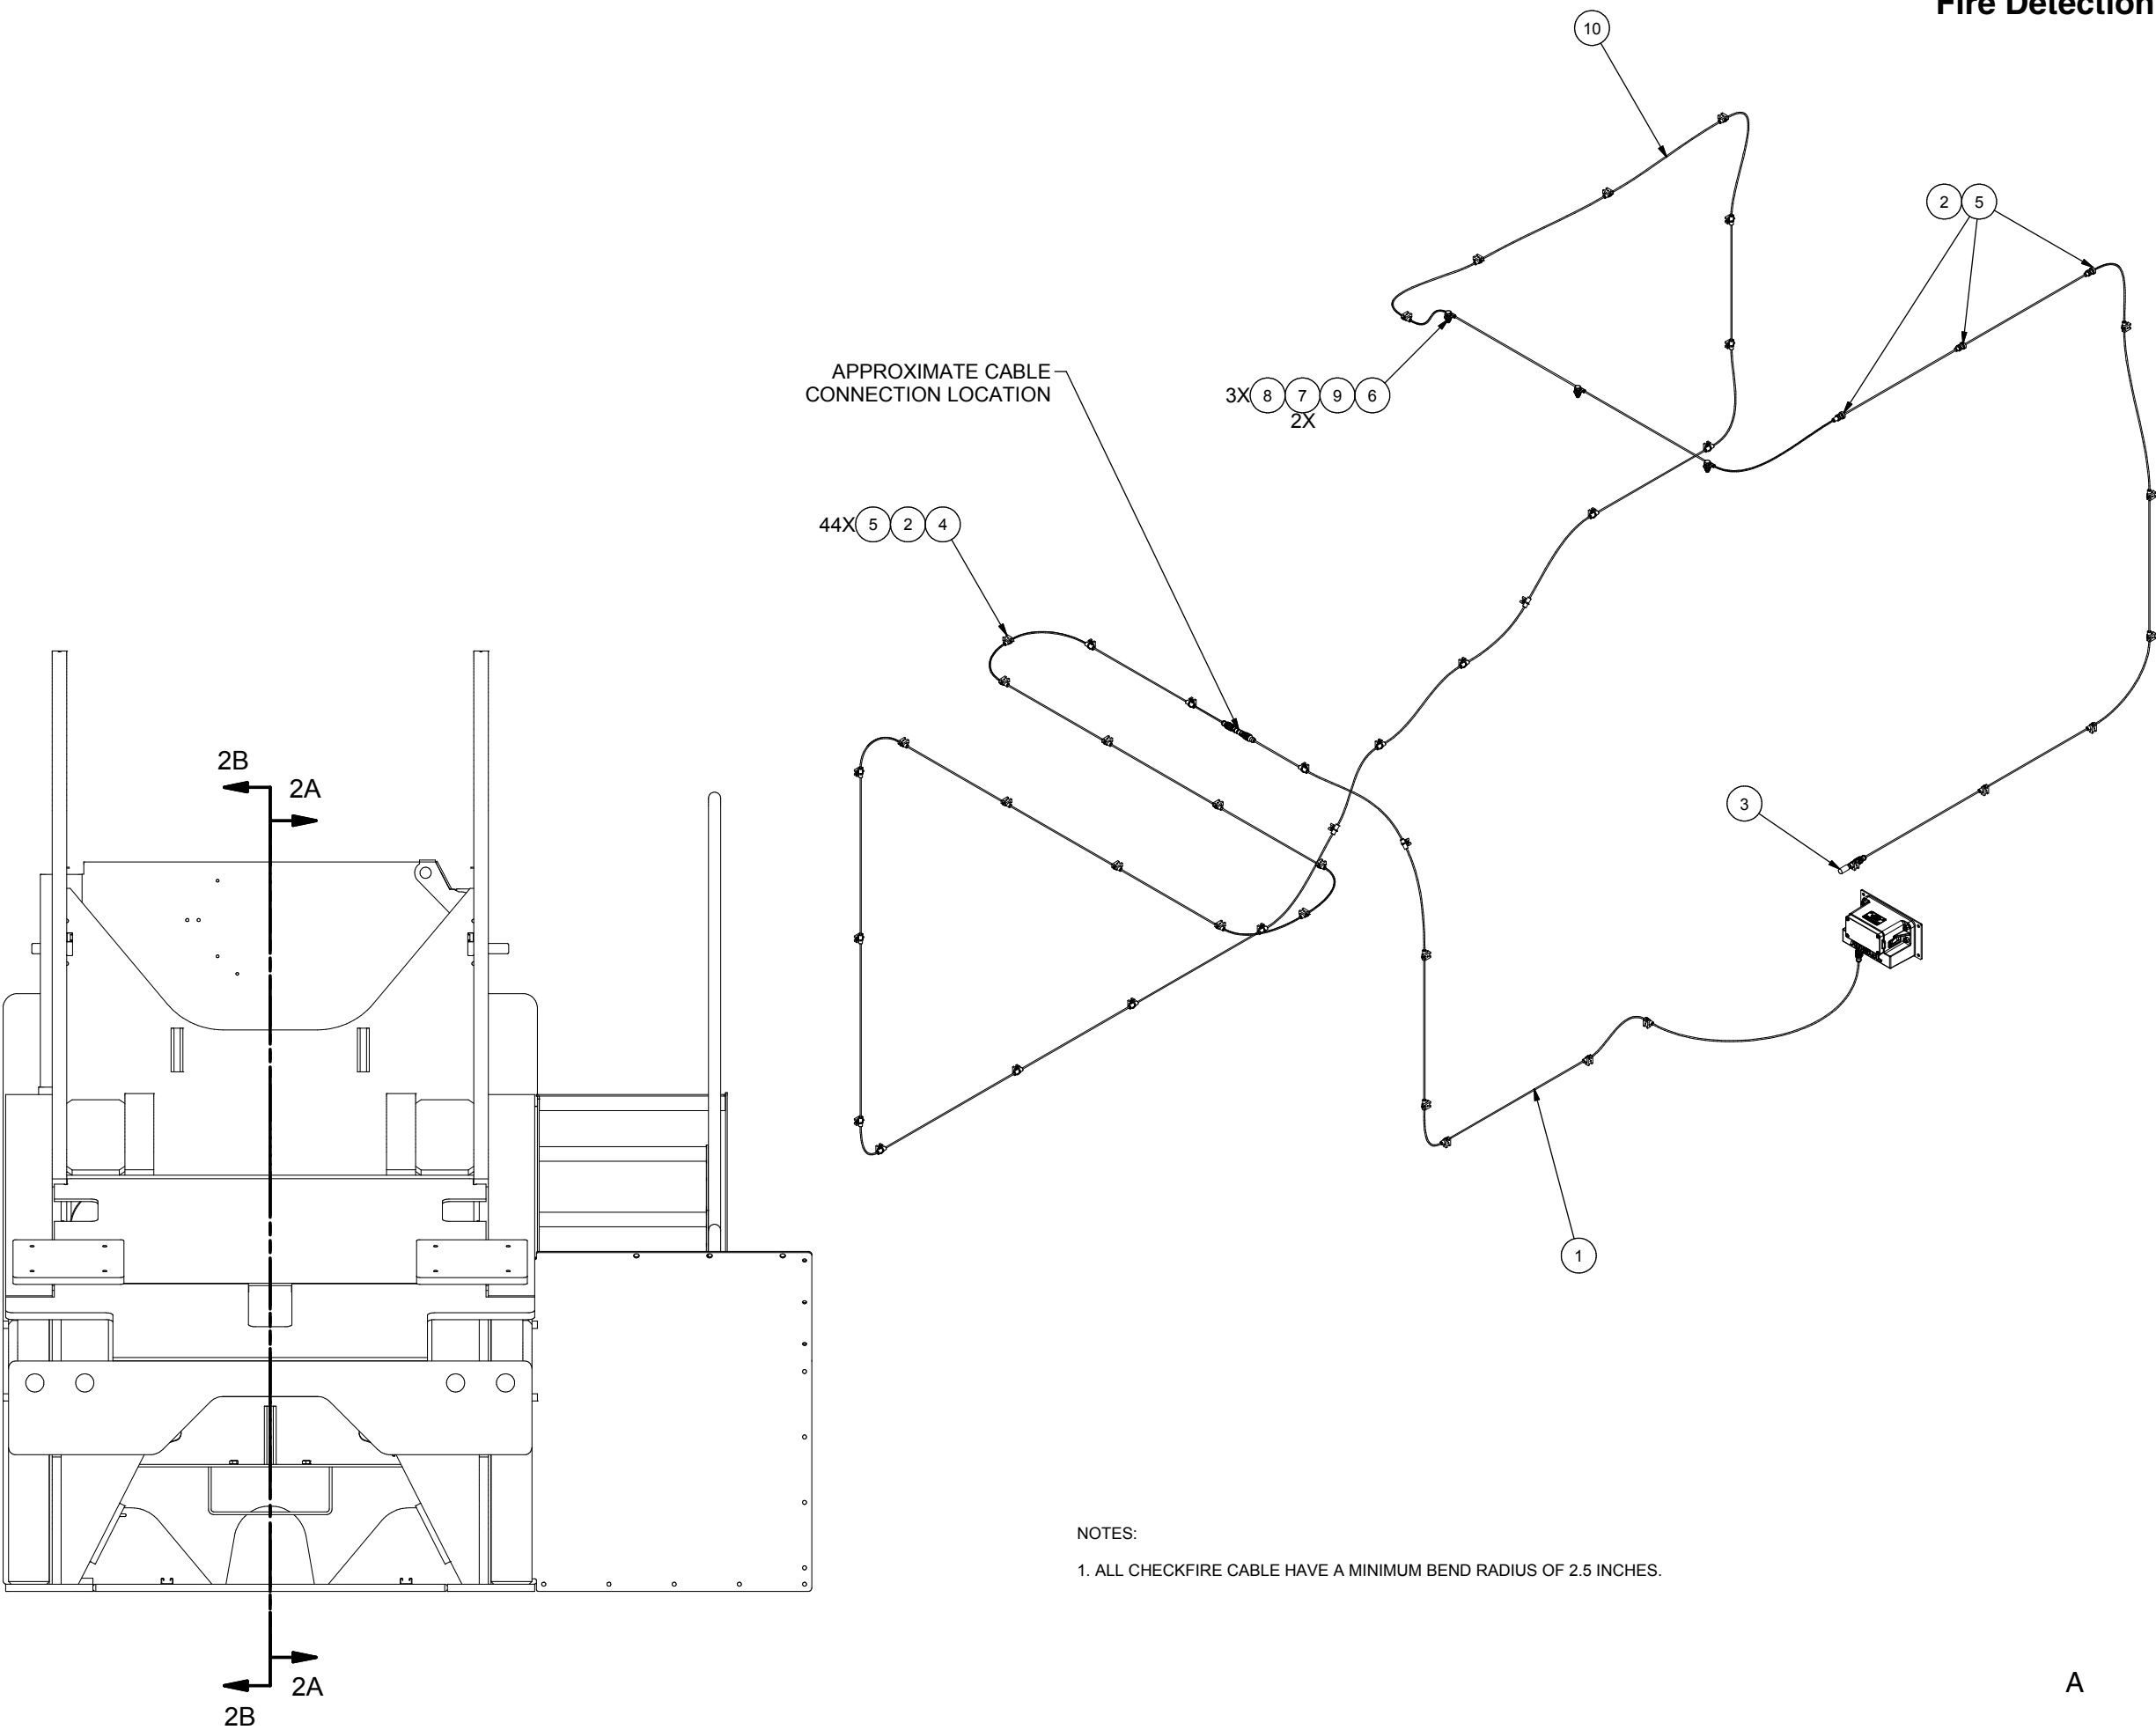

NOTES:
1. ALL CHECKFIRE CABLE HAVE A MINIMUM BEND RADIUS OF 2.5 INCHES.


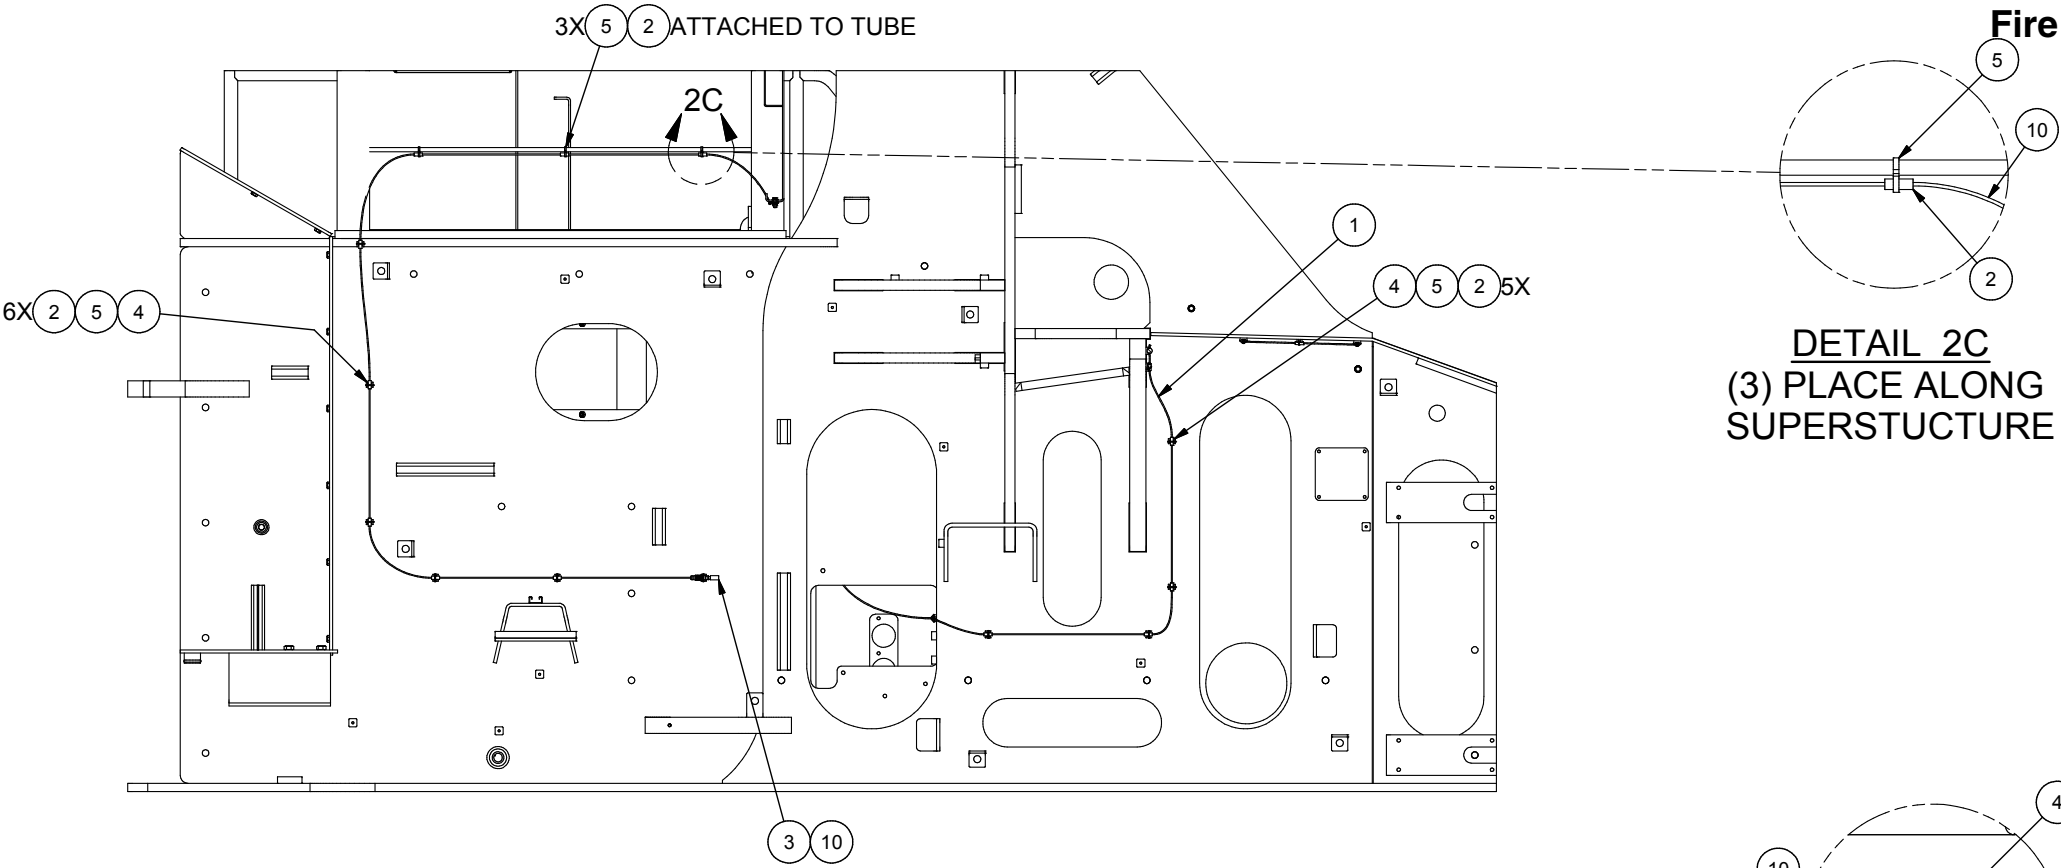


SECTION 2A-2A
SOME COMPONENTS NOT SHOWN FOR CLARITY

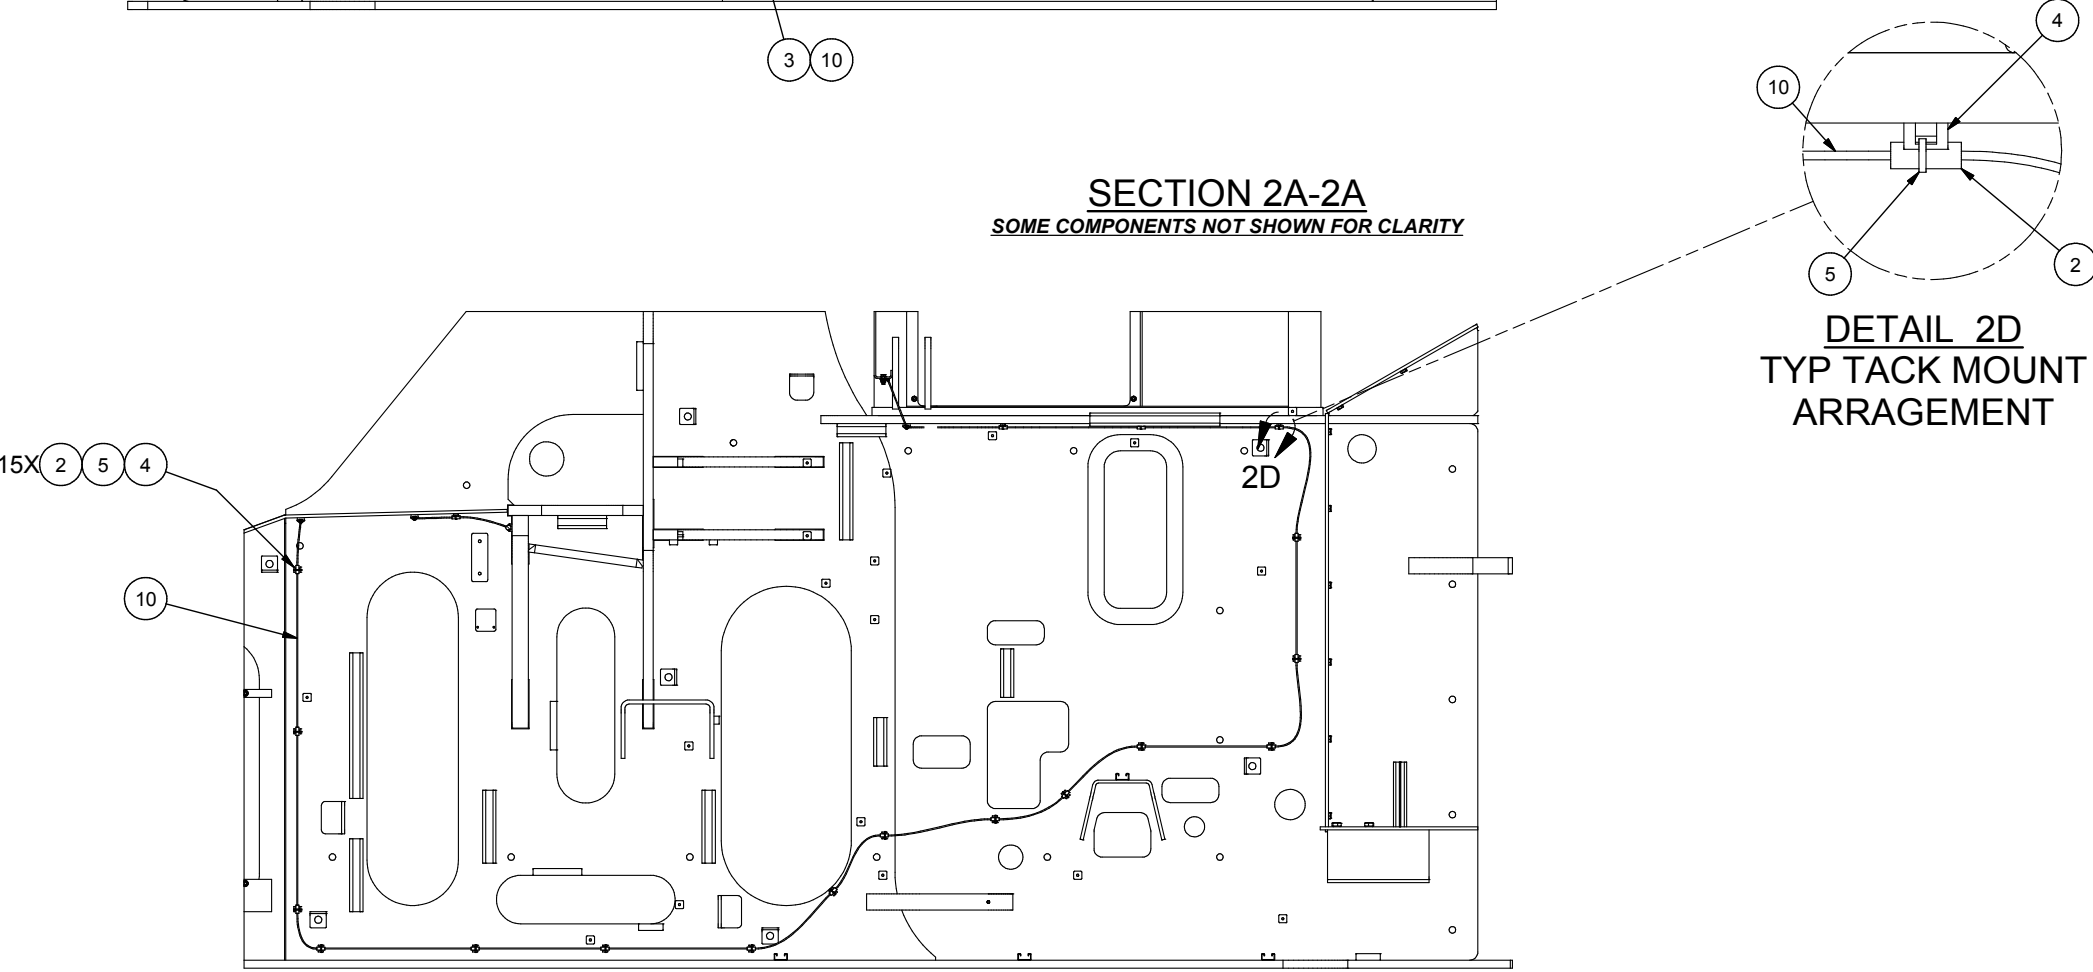


SECTION 2B-2B
SOME COMPONENTS NOT SHOWN FOR CLARITY

A

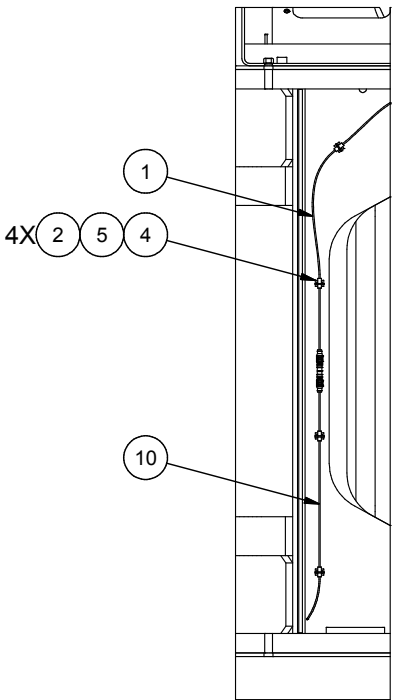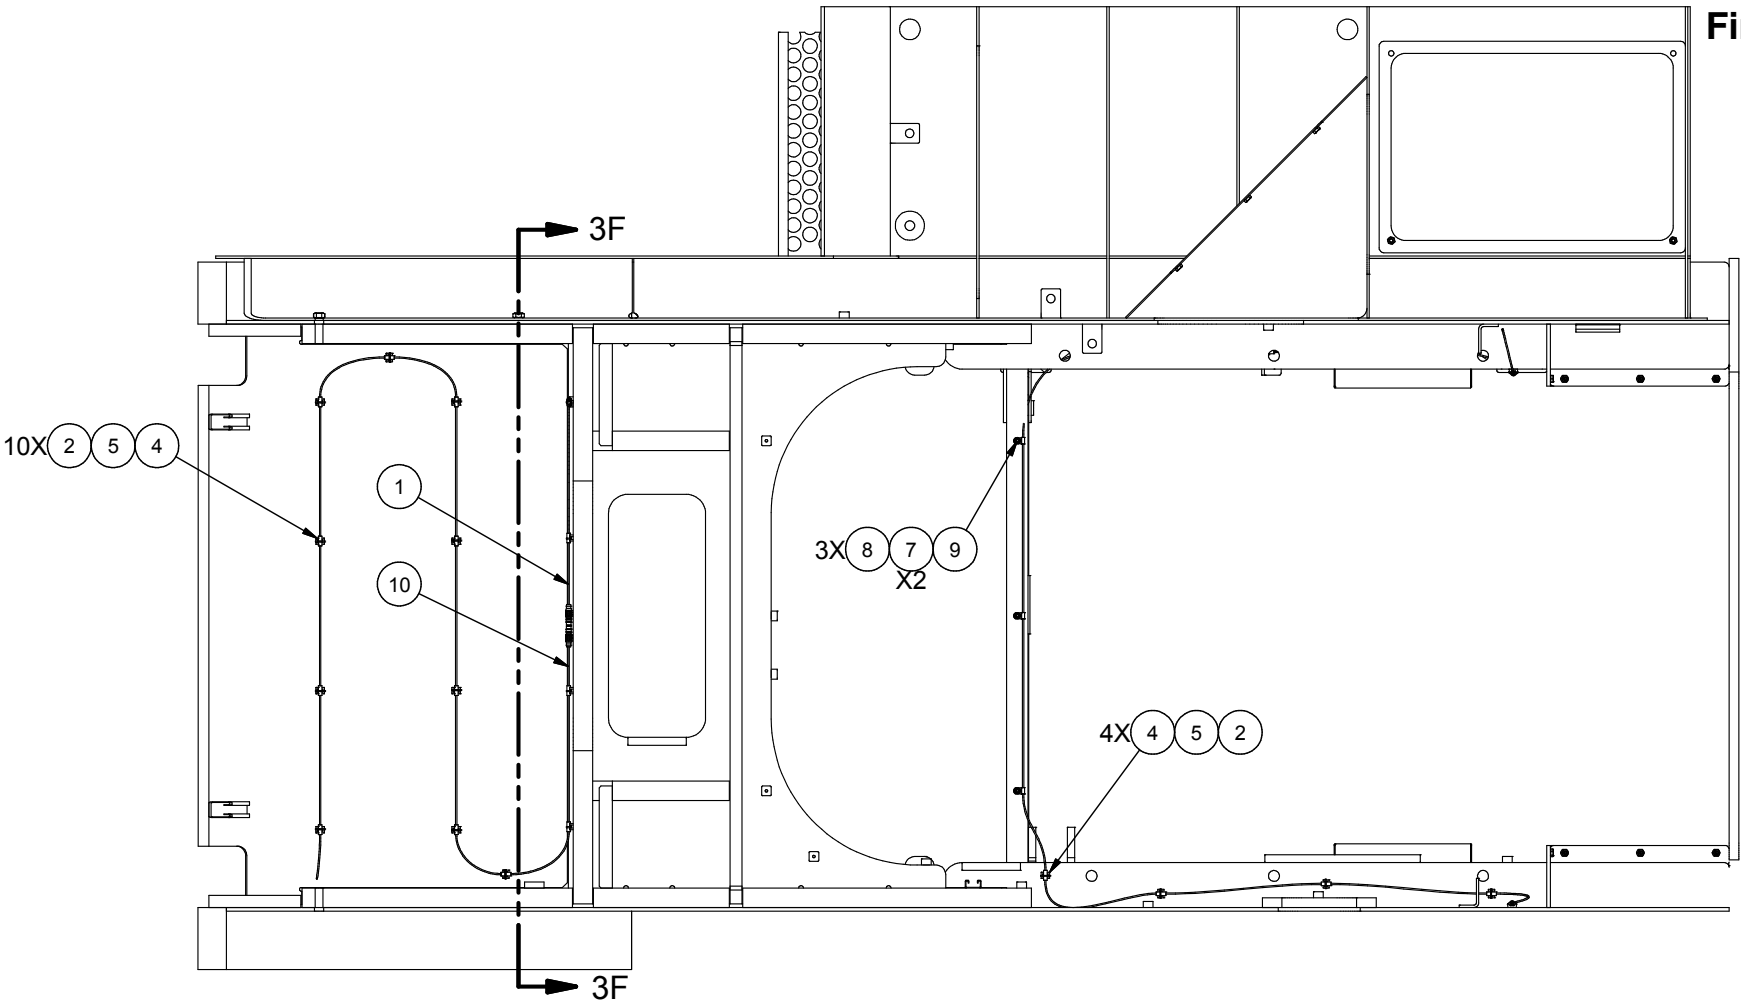

SECTION 3F-3F
SOME COMPONENTS REMOVED FOR CLARITY

SECTION 3E-3E

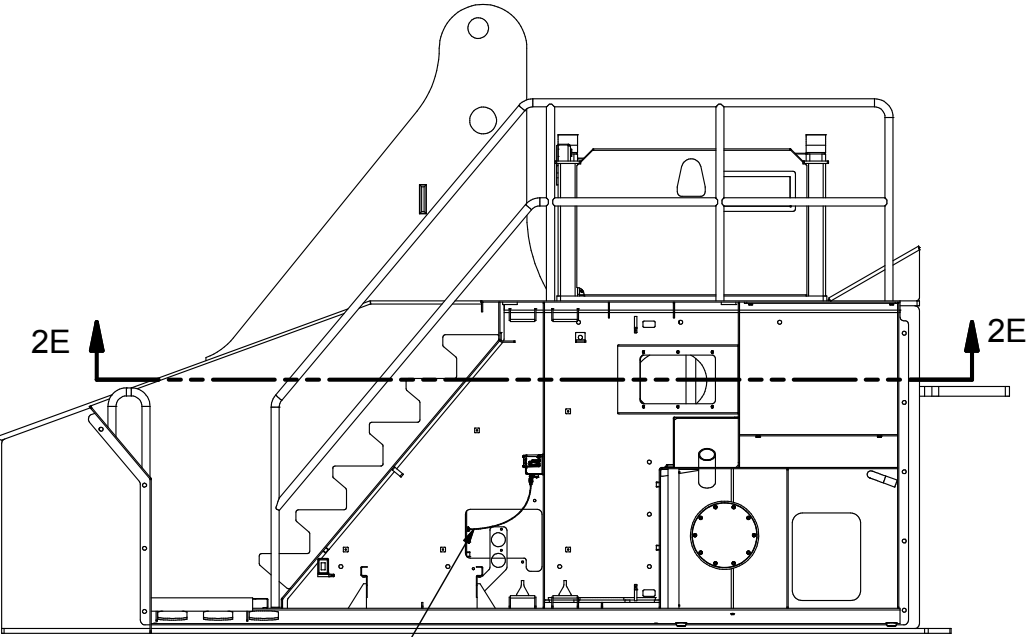

LEFT VIEW
SOME COMPONENTS REMOVED FOR CLARITY

A