




ALLIED WINCHES FOR: CASE DOZERS

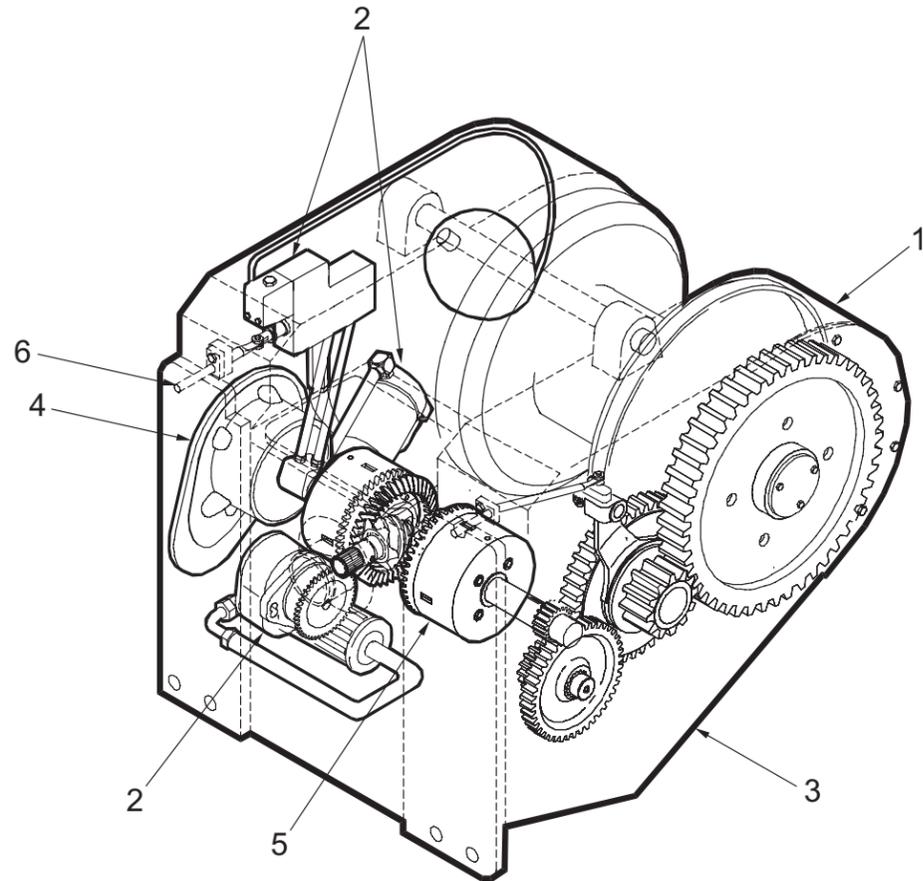


W5C shown. (Other models have similar features.)


Features

- 1. FLUSH DRUM**
Drum flush with frame to reduce line wear from side pulls.
- 2. SELF CONTAINED HYDRAULICS (SCH)**
Valve, pump, filter and hydraulic lines are inside winch for long component life and simplified winch installation.
- 3. HEAVY DUTY FRAME**
Protects, and allows easy access to internal components.
- 4. OIL BRAKE**
Spring applied, multiple-disc hydraulically released and oil cooled for long life. No heat fade. Eliminates routine adjustments.
- 5. MULTI-DISC CLUTCH**
Hydraulically applied clutch is automatically synchronized with the oil brake for smooth winch line control.
- 6. SINGLE LEVER CONTROL**
Connected to single spool control valve for excellent line control regardless of application.


Options




FAIRLEAD
Permits maximum line pull from all angles.




ARCH
Permits maximum line pull from angles and lifts load off ground for ease of skidding.




SLOW GEAR RATIO
For precise line speed control and increased line pull capacity.

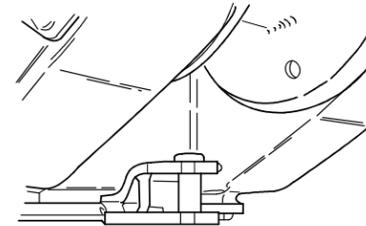

DRAWBAR
For pulling. Optional on W3C. Standard on W5C and W6G.



FREESPOOL
Disconnects drum from gearing drag to allow cable to be easily pulled out by hand. Standard on W3C, W5C and W6G.



PRECISE ELECTRONIC CONTROLS
ELECTRONIC CONTROLS
Simplified winch installation: only one wire harness needed to connect to control joystick. Provides unparallelled line speed control.

Parts and Service Support

Our parts depot carries a large parts inventory to support your dealer. Orders are generally filled within 24 hours from our depot to the dealer. Contact your dozer dealer for your winch parts and service.

Allied Systems
COMPANY

WINCH DIVISION

21433 SW OREGON STREET
SHERWOOD, OREGON 97140-9799, USA
PHONE: (503) 625-2560
FAX: (503) 625-7269 • (503) 625-5132
marketing@alliedsystems.com
www.alliedsystems.com

