


LCB 360° Rotating Bale Clamps

- LCB Series – for capacities to 5,000 lb
- Clean, grease-free handling – no lubrication required
- Thin slab style arms for easy entry between stack

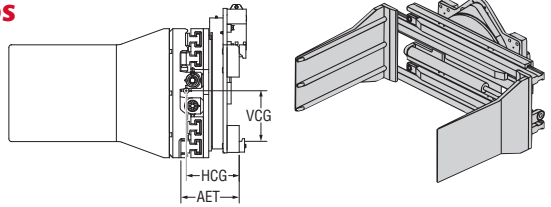


360° Rotating Bale Clamps, 2 Functions

| Model Number | Capacity lb @ 24" | Opening Range (in) | Arm Size H x L (in) | Mounting Class | Mounting Angle (°) ¹ | Lost Load AET (in) | HCG (in) | VCG (in) | Weight (lb) | |
|----------------|-------------------|--------------------|---------------------|----------------|---------------------------------|--------------------|----------|----------|-------------|-------|
| LCB-25RN-B1527 | | | 15 x 27 | | | 10.4 | 10.1 | 10.5 | 1,285 | |
| LCB-25RN-B1532 | 2,500 | 18.0–64.8 | 15 x 32 | II | 0 | 10.4 | 11.2 | 10.5 | 1,350 | |
| LCB-25RN-B1836 | | | 18 x 36 | | | | | | | 1,405 |
| LCB-35RN-B1527 | | | 15 x 27 | | | 10.4 | 10.0 | 10.4 | 1,325 | |
| LCB-35RN-B1532 | 3,500 | 18.0–69.8 | 15 x 32 | II | 0 | 10.4 | 11.5 | 10.5 | 1,418 | |
| LCB-35RN-B1836 | | | 18 x 36 | | | | | | | 1,447 |
| LCB-35RN-B1840 | | | 18 x 40 | | | | | | | 1,500 |
| LCB-35RN-B1848 | | | 18 x 48 | | | | | | | 1,610 |
| LCB-50RN-B1827 | | | 18 x 27 | II | 0 | 10.4 | 9.5 | | 1,578 | |
| | | | | III | 0 | 10.1 | 9.4 | 11.3 | 1,582 | |
| LCB-50RN-B1832 | | | 18 x 32 | II | 0 | 10.4 | 10.3 | | 1,610 | |
| | | | | III | 0 | 10.1 | 10.2 | | 1,615 | |
| LCB-50RN-B1836 | 5,000 | 21.0–75.4 | 18 x 36 | II | 0 | 10.4 | 11.3 | | 1,700 | |
| | | | | | III | 0 | 10.1 | 11.2 | 11.3 | 1,705 |
| LCB-50RN-B1840 | | | 18 x 40 | II | 0 | 10.4 | 12.2 | 1,753 | | |
| | | | | III | 0 | 10.1 | 12.1 | | 1,758 | |
| LCB-50RN-B1848 | | | 18 x 48 | II | 0 | 10.4 | 14.2 | 11.3 | 1,862 | |
| | | | | III | 0 | 10.1 | 14.1 | | 1,867 | |
| LCB-5GRN-B1827 | | | 18 x 27 | II | 0 | 10.9 | 9.4 | 11.2 | 1,790 | |
| | | | | III | 0 | 10.6 | 9.3 | | 1,795 | |
| LCB-5GRN-B1832 | 5,000 | 19.0–91.8 | 18 x 32 | II | 0 | 10.9 | 10.4 | 11.2 | 1,880 | |
| | | | | | III | 0 | 10.6 | | 10.3 | 1,885 |
| LCB-70RN-B1850 | 7,000 | 20–84 | 18 x 50 | III | 0 | 14.5 | 14.2 | 17.7 | 2,940 | |
| | | | | | IV | 0 | 14.5 | | 14.3 | 2,930 |
| LCB85RN-B1850 | 8,500 | 20–84 | 18 x 50 | III | 0 | 14.5 | 14.2 | 17.8 | 2,970 | |
| | | | | | IV | 0 | 14.5 | | 14.3 | 2,960 |
| LCB85RN-B1860 | 8,500 | 20–84 | 18 x 60 | III | 0 | 14.5 | 16.5 | 18.0 | 3,155 | |
| | | | | | IV | 0 | 14.5 | | 16.6 | 3,145 |

¹ Four degree (4°) mounting available at no charge.

LCB Folding Arm Clamps

- Designed for trailer-transported fork lifts, where folded arms reduce footprint
- Clean, grease-free handling — no lubrication required
- Rubber-covered aluminum contact pads
- Low profile body and thin-line heel offer unsurpassed visibility

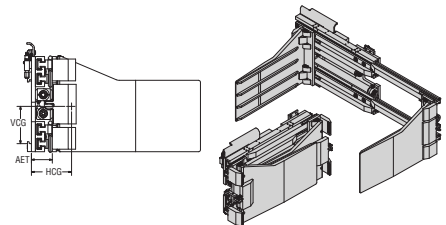

Folding Arm Clamps, 1 Function

| Model Number | Capacity lb @ 24" | Opening Range (in) | Arm Size H x L (in) | Mounting Class | Mounting Angle (°) ¹ | Lost Load AET (in) | HCG (in) | VCG (in) | Weight (lb) |
|----------------|-------------------|--------------------|---------------------|----------------|---------------------------------|--------------------|----------|----------|-------------|
| LCB-3MNN-F1836 | 3,500 | 22.6–77.3 | 18 x 36 | II | 0 | 6.25 | 10.3 | 4.3 | 1,195 |

Minimum truck carriage width for LCB-3MNNF-1836 is 31".