


## LCS Drum Clamps

- Designed to handle 55-gallon steel drums
- Rubber covered non-slip pads
- Other pad/drum styles and higher capacities available
- 2-drum model handles 1 or 2 drums
- 4-drum model handles 2 or 4 drums
- Available in 2-drum (side-by-side) and 4-drum (side-by-side, two deep) models

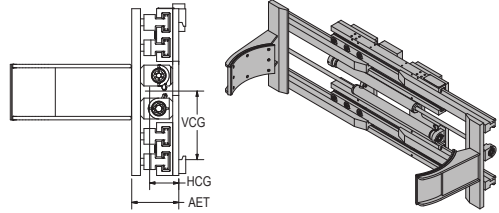

### Non-Sideshifting, 2-Drum Clamps, 1 Function

Model Number	Capacity lb @ 24"	Opening Range (in)	Arm Size H x L (in)	Mounting Class	Angle (°)	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
LCS-25NN-D2A18	2,500	18.3–65.0	8 x 18	II	0	5.0	7.8	8.7	640
LCS-35NN-D2A18	3,500	18.3–70.0							655

### Sideshifting, 2-Drum Clamps, 2 Functions


LCS-25NS-D2A18	2,500	18.3–65.0	8 x 18	II	0	5.0	7.8	8.7	640
LCS-35NS-D2A18	3,500	18.3–70.0							655

### 360° Rotating, 2-Drum Clamps, 2 Functions

LCS-25RN-D2A18	2,500	18.3–65.0	8 x 18	II	0	10.4	10.5	13.0	900
LCS-35RN-D2A18	3,500	18.3–70.0							920

### Non-Sideshifting, 4-Drum Clamps, 1 Function

LCS-25NN-D4D42	2,500	15.0–61.5	8 x 42	II	0	5.0	8.7	6.7	775
LCS-35NN-D4D42	3,500	15.0–66.5							790
LCS-50NN-D4D42	5,000	18.0–72.0	8 x 42	II or III	0	5.0/6.0	8.9/9.9	6.9	875

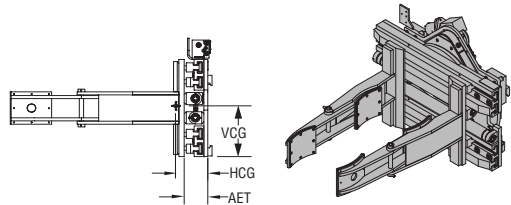

### Sideshifting, 4-Drum Clamps, 2 Functions

LCS-25NS-D4D42	2,500	15.0–61.5	8 x 42	II	0	5.0	8.7	6.7	775
LCS-35NS-D4D42	3,500	15.0–66.5							790
LCS-50NS-D4D42	5,000	18.0–72.0	8 x 42	II or III	0	5.0	8.9	6.9	875

### 360° Rotating, 4-Drum Clamps, 2 Functions

LCS-25RN-D4D42	2,500	15.0–61.5	8 x 42	II	0	10.4	12.4	12.7	1,035
LCS-35RN-D4D42	3,500	15.0–66.5							1,050
LCS-50RN-D4D42	5,000	18.0–72.0	8 x 42	II or III	0	10.4/10.1	12.9/12.6	12.8	1,485

Note: 2-drum handles 1 or 2 drums; 4-drum handles 2 or 4 drums

### ! Minimum Truck Carriage Width

Model Number	Body Width (in)	Minimum Truck Carriage Width (in)
LCS-25	36	30
LCS-25RN	36	29
LCS-35	41	35
LCS-35RN	41	29
LCS-50	41	35
LCS-50RN	41	33