


## LCS Bar Positioners

- Clean, grease-free handling of textile rolls
- Visibility that puts the driver in control
- Application engineered for the textile industry
- Hardened tips standard for extended life

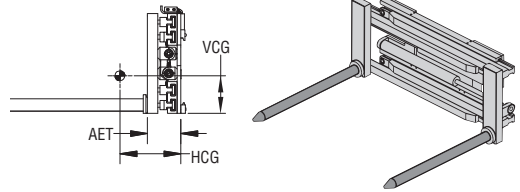

### Non-Sideshifting Bar Positioners, 1 Function

Model Number	Capacity (lb) @ 24" <sup>1</sup>	Opening Range (in)	Arm Size D x L (in)	Mounting Class	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
LCS-45NN-R2542	4,500	10.0-56.8	2.5 x 42	II	9.0	7.2	8.2	764
LCS-45NN-R2548	4,500		2.5 x 48			8.1	8.0	780
LCS-45NN-R3042	4,500	10.0-56.8	3 x 42	II or III	9.0/10.0	8.6/9.6	7.5	821
LCS-45NN-R3048	4,500		3 x 48			9.8/10.8	7.2	845
LCS-45NN-R3060	4,500		3 x 60			12.6/13.6	6.7	893
LCS-45NN-R3072	4,500		3 x 72		15.6/16.6	6.3	941	
LCS-4RNN-R3042	4,500		3 x 42		9.0/10.0	8.6/9.6	7.5	821
LCS-4RNN-R3048	4,500		3 x 48			9.8/10.8	7.2	845
LCS-4RNN-R3060	4,500	3 x 60	12.6/13.6	6.7		893		
LCS-4RNN-R3072	4,500	3 x 72	15.6/16.6	6.3	941			

### Sideshifting Bar Positioners, 2 Functions

LCS-45NS-R2542	4,500	10.0-56.8	2.5 x 42	II	9.0	7.2	8.2	764
LCS-45NS-R2548	4,500		2.5 x 48			8.1	8.0	780
LCS-45NS-R3042	4,500	10.0-56.8	3 x 42	II or III	9.0	8.6	7.5	821
LCS-45NS-R3048	4,500		3 x 48			9.8	7.2	845
LCS-45NS-R3060	4,500		3 x 60			12.6	6.7	893
LCS-45NS-R3072	4,500		3 x 72		15.6	6.3	941	
LCS-4RNS-R3042	4,500		3 x 42		9.0	8.6	7.5	821
LCS-4RNS-R3048	4,500		3 x 48			9.8	7.2	845
LCS-4RNS-R3060	4,500	3 x 60	12.6	6.7		893		
LCS-4RNS-R3072	4,500	3 x 72	15.6	6.3	941			

<sup>1</sup>Capacity rating specified is basic. Provide roll weight and length to ensure proper arm size selection

### Recommended Hydraulic Supply

Model Number	Flow (gpm)	Max psi
LCS Models	7-10	2,500

Hydraulic flow less than minimum may reduce operating speed and/or cause irregular arm movement. Higher flow may result in heat build-up, erratic operation and shortened hydraulic system life.

### Installation Kits

Model Number	Number of Functions
YHJL-6-S-30	1
YHJL-8-S-30	
YHJL-6-D-30	2
YHJL-8-D-30	

Includes the hoses to connect a standard attachment to the hose terminal on the lift truck carriage.

### Optional Mounting Hooks

	Description
Class II	Quick change hooks
Class III	Quick change hooks

Mounting other than shown, consult factory.

### Minimum Truck Carriage Width

Model Number	Body Width (in)	Minimum Truck Carriage Width (in)
All models	41	35