


Double-Wide Carton Clamp

- Designed for handling one or two unit loads at a time
- Clean, grease-free handling.
- Repair-N-Place serviceability

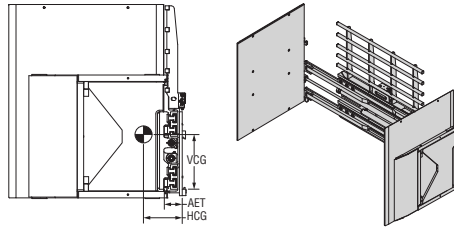


Sideshifting Carton Clamps, 2 Functions

Model Number	Capacity lbs @ 24" LC	Opening Range (in)	Arm Size L x H (in)	Body Width	Mounting Class	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lbs)
LCC-1DNS-B4848	1,500	36 – 102	48 x 48	48	II	5.0	12.6	14.5	1,568
LCC-2DNS-B4848	2,500	36 – 102	48 x 48	52	II	5.1	12.5	14.5	1,590
LCC-3DNS-B4848	3,500	26 – 102	48 x 48	62	II	5.0	12.4	14.7	1,690

Razor-Flex Arm Design

- Designed to handle large loads with a thin arm profile
- Larger capacity available

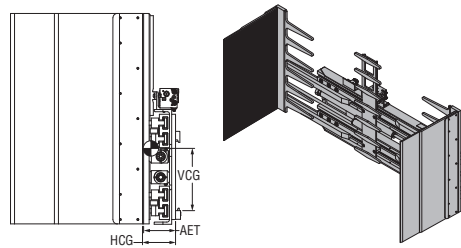

Sideshifting Carton Clamp, 2 Functions

Model Number	Capacity lbs @ 24" LC	Opening Range (in)	Arm Size L x H (in)	Mounting Class	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
LCC-25NS-F3030			30 x 30			6.3	10.2	880
LCC-25NS-F3430	2,500	17.9–67.6	34 x 30	II	5.75	6.3	10.2	905
LCC-25NS-F3048			30 x 48			6.4	10.2	1,160

Lower Mounting Hooks

Model Number	Mounting Class	Angle (°)	Description
ANO	II	0	Bolt-on
AQ0			Quick change

Installation Kits

Model Number	Number of Functions
YHJL-6-D-30	2
YHJL-8-D-30	

Includes the hoses to connect a standard attachment to the hose terminal on the lift truck carriage.

Recommended Hydraulic Supply

Model Number	Flow (gpm)	Max psi
All Models	7–9	2,500

Hydraulic flow less than minimum may reduce operating speed and/or cause irregular arm movement. Higher flow may result in heat build-up, erratic operation and shortened hydraulic system life.

Minimum Truck Carriage Width

Model Number	Body Width (in)	Minimum Truck Carriage Width (in)
LCC-1D	48	33
LCC-2D	52	37
LCC-3D	62	39
LCC-25	41	35