


## Double-Wide Carton Clamp

- Designed for handling one or two unit loads at a time
- Clean, grease-free handling.
- Repair-N-Place serviceability

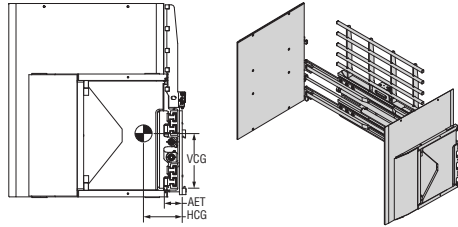


### Sideshifting Carton Clamps, 2 Functions

Model Number	Capacity lbs @ 24" LC	Opening Range (in)	Arm Size L x H (in)	Body Width	Mounting Class	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lbs)
LCC-1DNS-B4848	1,500	36 – 102	48 x 48	48	II	5.0	12.6	14.5	1,568
LCC-2DNS-B4848	2,500	36 – 102	48 x 48	52	II	5.1	12.5	14.5	1,590
LCC-3DNS-B4848	3,500	26 – 102	48 x 48	62	II	5.0	12.4	14.7	1,690

## Razor-Flex Arm Design

- Designed to handle large loads with a thin arm profile
- Larger capacity available

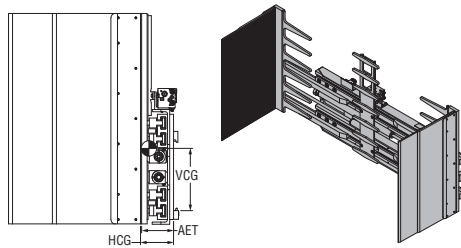

### Sideshifting Carton Clamp, 2 Functions

Model Number	Capacity lbs @ 24" LC	Opening Range (in)	Arm Size L x H (in)	Mounting Class	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
LCC-25NS-F3030			30 x 30			6.3	10.2	880
LCC-25NS-F3430	2,500	17.9–67.6	34 x 30	II	5.75	6.3	10.2	905
LCC-25NS-F3048			30 x 48			6.4	10.2	1,160

## Lower Mounting Hooks

Model Number	Mounting Class	Angle (°)	Description
ANO	II	0	Bolt-on
AQO			Quick change

## Recommended Hydraulic Supply

Model Number	Flow (gpm)	Max psi
All Models	7–9	2,500

Hydraulic flow less than minimum may reduce operating speed and/or cause irregular arm movement. Higher flow may result in heat build-up, erratic operation and shortened hydraulic system life.

## Installation Kits

Model Number	Number of Functions
YHJL-6-D-30	2
YHJL-8-D-30	

Includes the hoses to connect a standard attachment to the hose terminal on the lift truck carriage.

## Minimum Truck Carriage Width

Model Number	Body Width (in)	Minimum Truck Carriage Width (in)
LCC-1D	48	33
LCC-2D	52	37
LCC-3D	62	39
LCC-25	41	35