

2300 NE Oregon Street, Sherwood, Oregon 97140-9799 U.S.A. • TEL (503) 625-2560 • FAX (503) 625-5132

DATE: 28 MAY 93

PAGE: 1 of 1

BULLETIN NO _____ WSB0338

SECTION _____ (08) Axle

MODEL(S) _____ L80F/L100/L100F/L120D/
L4120D/L130B/L4130

Subject: Wheel Wedges (Dual Drive Wheels)

For easier removal of wheel wedges on all dual drive wheel applications, a puller hole has been added to each wedge.




WARNING

Be sure both tires are completely deflated before loosening lug nuts.

To remove the wedges, simply loosen the lug nuts. **Do Not** remove the lug nuts at this time, as this prevents the wedge from possibly breaking loose, falling off and causing personal injury. Insert a puller bolt into each wedge puller bolt hole, and force each wedge free.

Current production machines will have this updated wedge, and any new wedges ordered through your WAGNER dealer parts department should be the new type with a puller hole.

If you choose to rework your existing wedges, please contact your local dealer for proper drilling and tapping instructions.

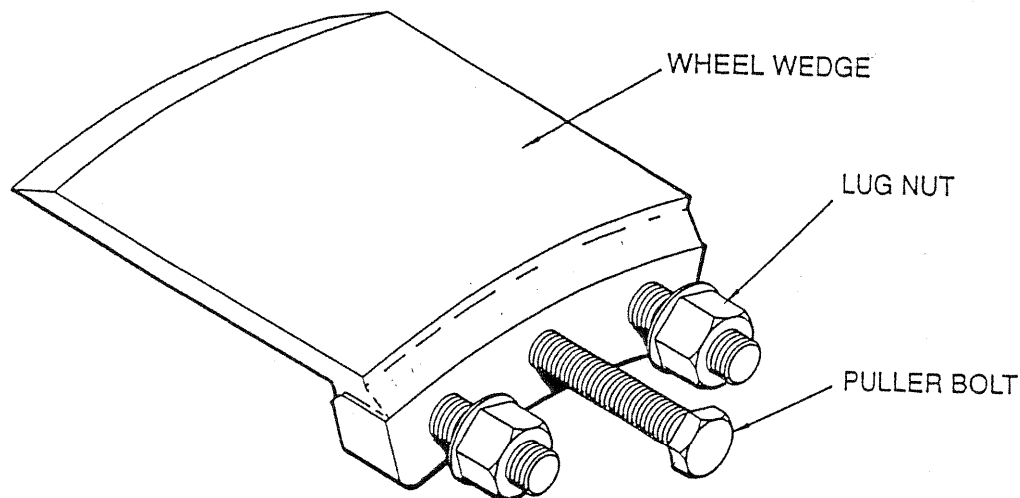

WHEEL & TIRE NOT SHOWN