


FRONT AXLE INSTALLATION

L90/L490 L120/L4120

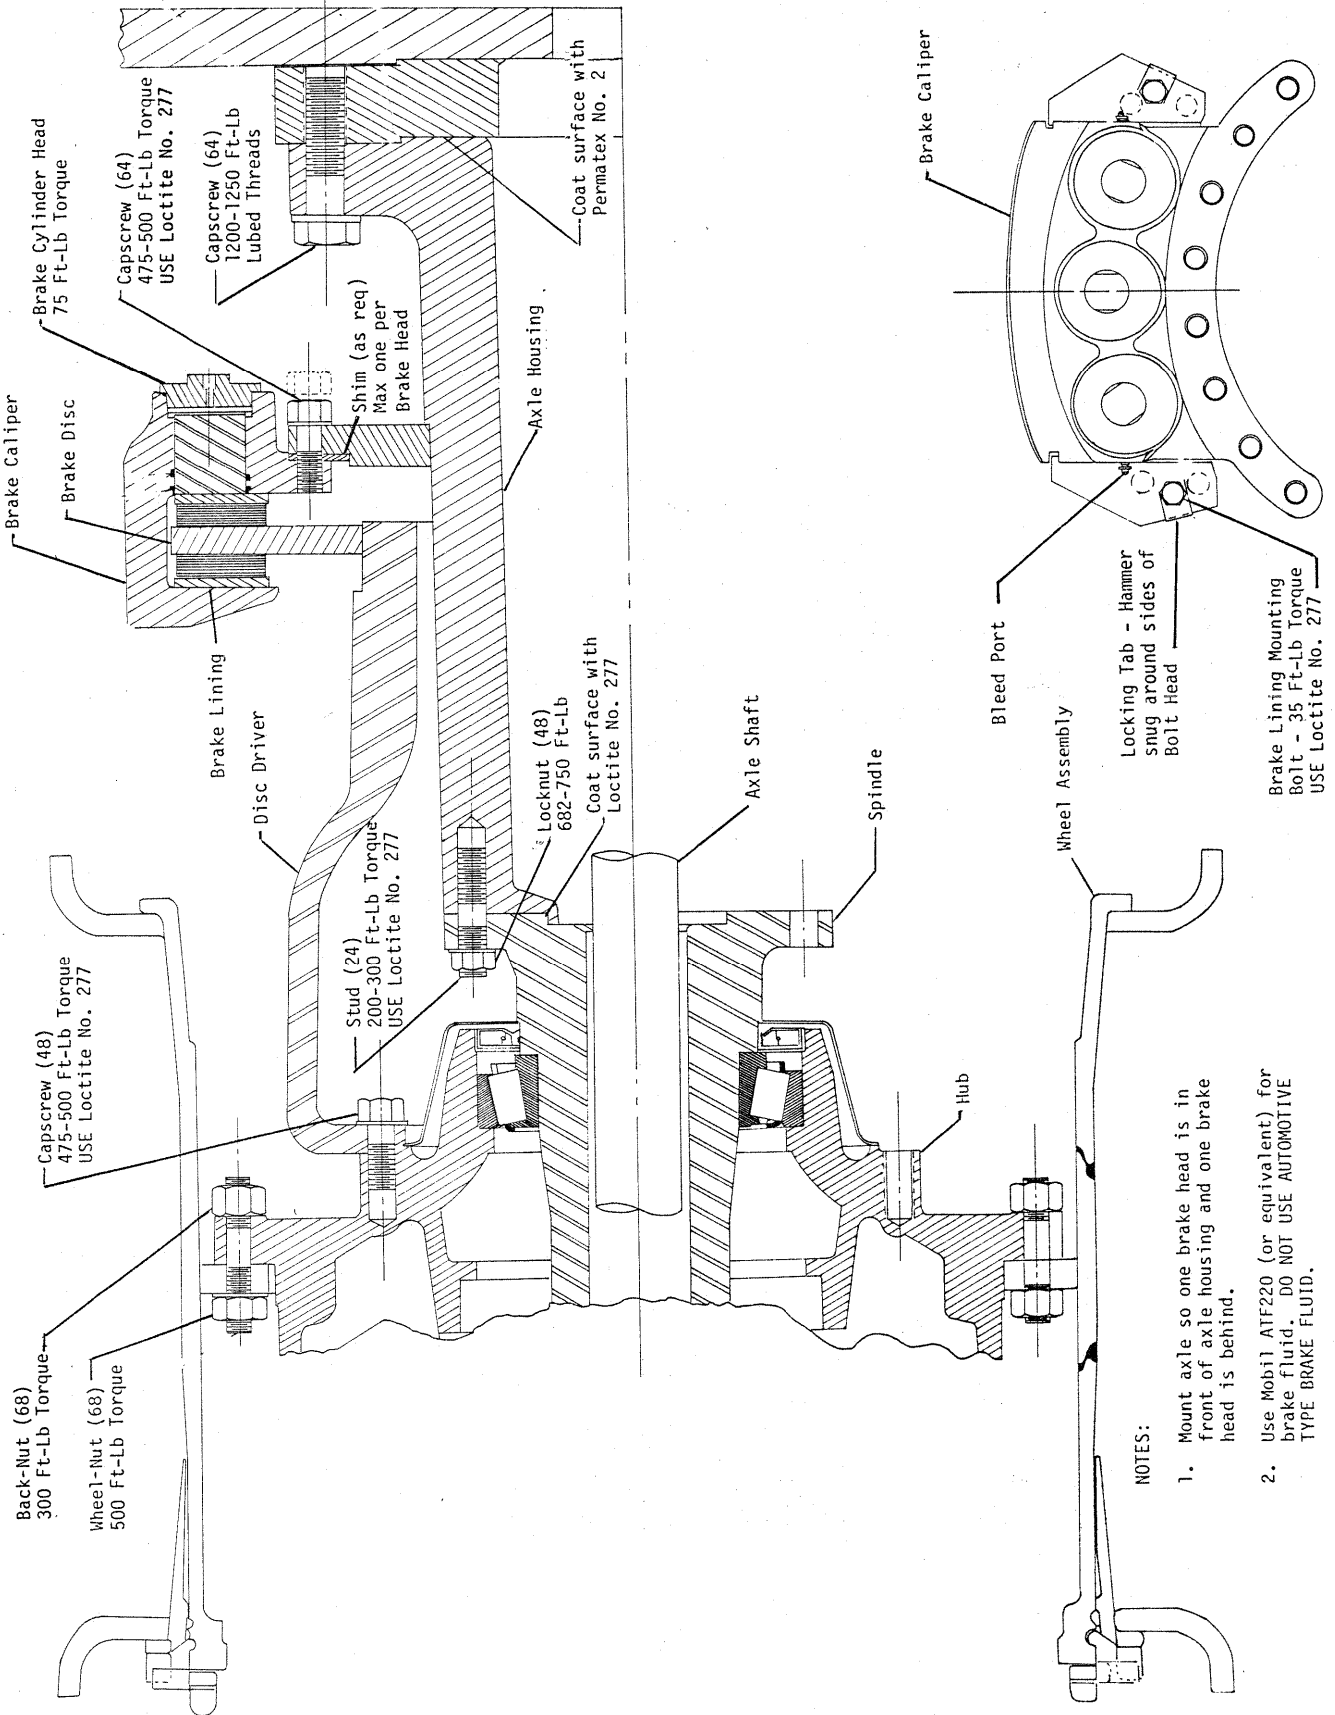

NOTES:

1. Mount axle so one brake head is in front of axle housing and one brake head is behind.
2. Use Mobil ATF220 (or equivalent) for brake fluid. DO NOT USE AUTOMOTIVE TYPE BRAKE FLUID.
3. Differential and carrier must be mounted with ring gear on LH side of pinion (input shaft) when viewed from the input drive yoke.