

## In Case of Fire

### Fire Suppression System

Your Fire Suppression System consists of an automatic detection system and one manual actuator. The CHECKFIRE 210 Interface Control Module (ICM) system is located to the right of the steering column, mounted to the right hand wall of the cab (see Figure 4-14-1). A manual actuator is mounted on the chassis, at ground level, just to the left of the right side boarding stairs (See Figure 4-14-2).

The red button “PUSH TO ACTIVATE” on the CHECKFIRE 210 ICM and the actuator at ground level will both set off the system.



Figure 4-14-1 CHECKFIRE 210 ICM

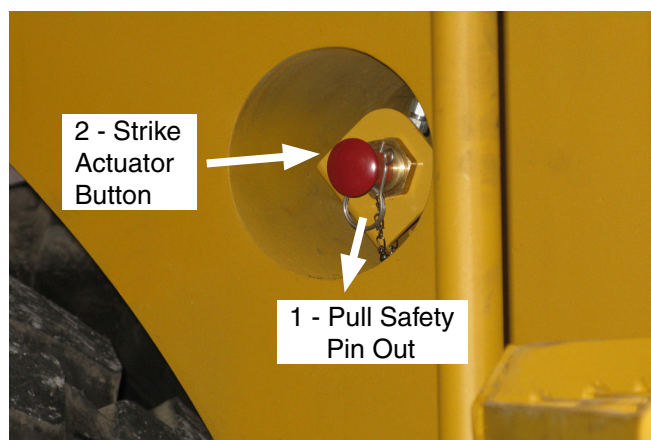


Figure 4-14-2 Ground Level Manual Actuator

**IMPORTANT!** The system may be actuated by either the operator or by ground personnel.

The operator may activate the system by pressing the red button on the CHECKFIRE 210 ICM located to the right of the steering column, mounted to the right hand wall of the cab (see Figure 4-14-1 and Figure 4-14-3).

Ground personnel may active the fire suppression system by pulling the pin and striking the button on the ground level actuator mounted on the chassis, at ground level, just to the left of the right side boarding stairs (See Figure 4-14-2)

### In Case Of Fire

1. Swing the guard door open, press the red “Push to Activate” button on the CHECKFIRE 210 ICM and then LEAVE THE VEHICLE (see Figure 4-14-3). Fire retardant will be released, the engine will shut down, and the batteries will be disconnected from the electrical system.

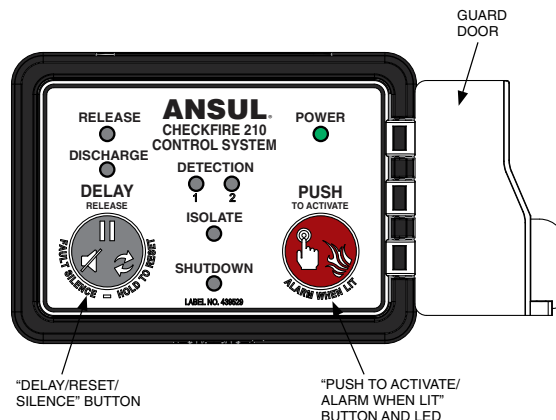


Figure 4-14-3 CHECKFIRE 210 ICM

2. Call the Fire Department and/or service personnel as soon as possible. After the system has discharged, watch carefully for flare ups and spot fires while maintaining a safe distance.
3. Stay clear of the vehicle until it has cooled completely.



## WARNING

**After a fire, hydraulic and coolant hoses are an extreme hazard.**

**Stay away from the machine until it has cooled completely.**

**The hoses containing these very hot, pressurized fluids may have been damaged by the fire and could burst at any time, causing serious burns or other injuries.**

4. Any time the system is discharged, it must be refilled and recharged before resuming operation. Only Ansul representatives are authorized to refill/recharge the fire suppression system.



## CAUTION

**All maintenance and servicing should be performed by a qualified service technician from your local authorized service center for your fire suppression system.**

See form 80-1106 (located in your manual pack or <http://www.alliedsystems.com/pdf/Wagner/Forms/80/80-1106.pdf>) for more information on your CHECKFIRE 210 ICM system.