

Load Splitting

1. Approach the load with the holddown arms open.
2. Raise the carriage and tilt it forward slightly.
3. Work the tines through approximately 1/3 of the load (see Figure 4-6-1).
4. Bring the kickoff arms forward until they make contact with the load, then pull the load in tight with the holddown arms. Tilt the carriage back.
5. Continue to tighten with the holddown arms and raise the carriage until the load is free.

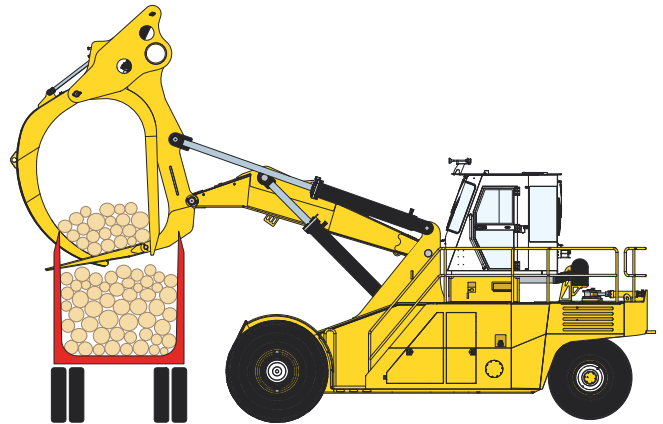


Figure 4-6-1 Load Splitting

INTENTIONALLY LEFT BLANK