


Operating Tips

NOTE: These tips, and the previous operating sections, discuss a Logstacker with the standard Wagner carriage, and are for reference only. Your carriage and operating procedures may differ.

1. For maximum visibility and overall safety, travel in reverse whenever possible. Always travel in reverse when the machine is loaded. Keep the load as low as is practical.
2. Always make sure that the kickoff arms are fully retracted and against their stops when carrying a full load. Leaving them partially extended could result in damage if the load should shift or roll with any force. To obtain the greatest lift capacity, the kickoff arms must be all the way back. This way the load center is as far back as possible.
3. **WITHOUT FAIL** - always secure a load before allowing the binder chains to be removed, either by clamping the load with the holddown arms, or by some other safe means provided by your company.
4. The holddown and kickoff arms can be damaged if they are used in any way that opposes the movement of the machine under power. For example, never use the holddown arms to drag a log while moving in reverse.
5. Reduce your speed when operating at night, or under other reduced visibility situations. Never travel at a speed where your stopping distance exceeds how far you can clearly see.

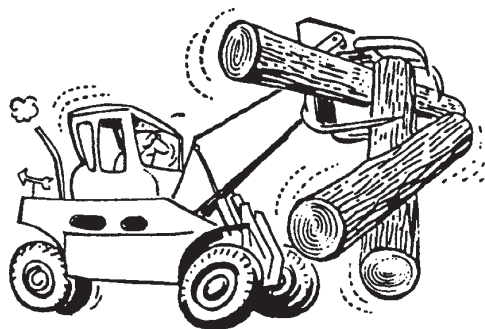

INTENTIONALLY LEFT BLANK