


Hydraulic Cylinder

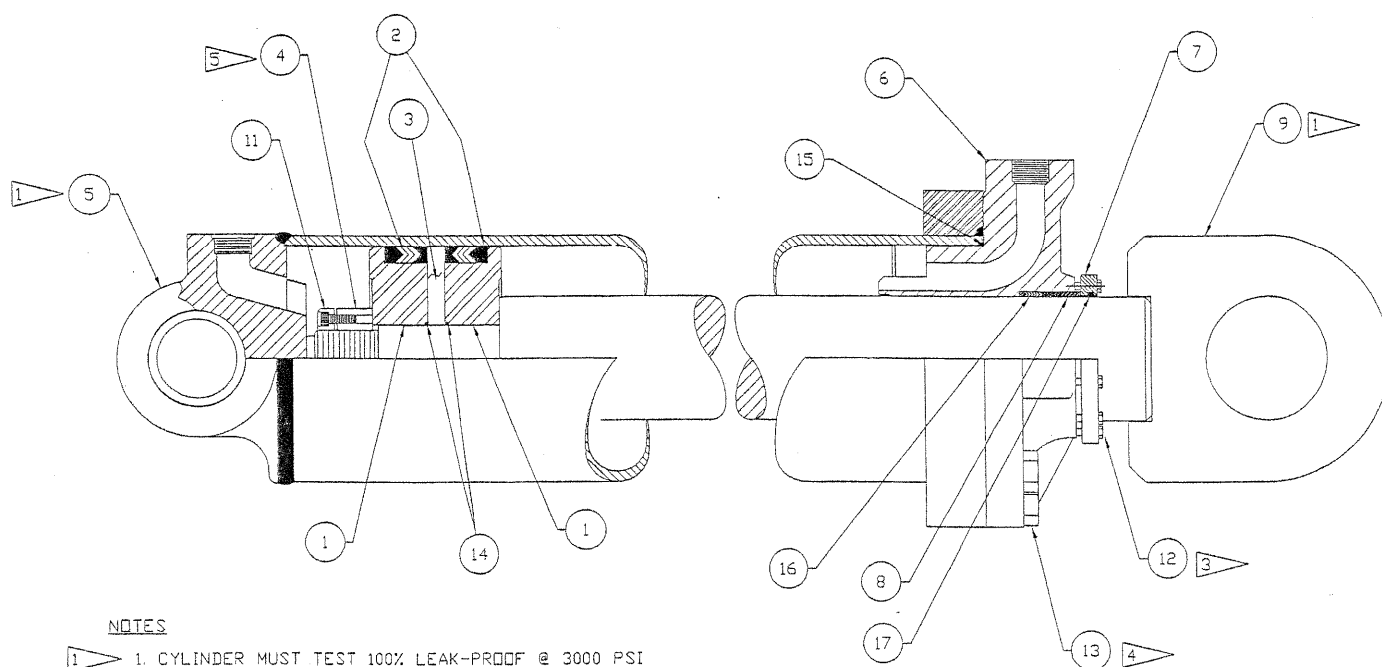

NOTES

1. CYLINDER MUST TEST 100% LEAK-PROOF @ 3000 PSI
 3. TORQUE TO 18 FT-LBS THEN ADJUST TO STOP ANY LEAKING
 4. TORQUE TO 1000 FT-LBS
 5. TORQUE TO 2000 FT-LBS

Item	Part No.	Qty	Description	Item	Part No.	Qty	Description
	558685		Hydraulic Cylinder				
1	505576	2	. Piston	11	234721	1	. Capscrew
2	* 566425	2	. Packing	12	230487	10	. Capscrew
3	505578	1	. Spacer, Piston	13	230260	8	. Capscrew
4	505951	1	. Nut, Cylinder Stem	14	* 203525	2	. O-Ring
5	523068	1	. Barrel & Eye Assembly	15	* 203565	1	. O-Ring
6	533664	1	. Packing Gland	16	* 566440	1	. Packing, Stem
7	533665	1	. Retainer	17	* 219337	1	. Wiper Ring
8	533666	1	. Bush				
9	558686	1	. Stem Assembly				

* Included in 566401 Service Kit