


Cab Assembly

Cab Assembly


Item	Part No.	Qty	Description	Item	Part No.	Qty	Description
	588340		Cab Assembly				
1	588360	1	. Cab Weldment	24	* 582699	1	. Insulation Installation,Cab
2	592855	1	. Decal, Wheel Nuts	25	227299	1	. Plug, Knockout
3	557341	1	. Decal, Warning	26	569146	1	. Plate,Threshold
4	528880	1	. Decal, Transmission Oil	27	09420904	3	. Capscrew
5	576856	1	. Decal, Warning	28	200454W	8	. Capscrew
6	* 588630	1	. Console Assembly	29	570391	8	. Washer, Sq
7	* 579757	1	. Wiper Assembly, Front	30	224202	8	. Nut, Esna
8	* 579758	1	. Wiper Installation,24V Rear	31	222615	8	. Flat Washer
9	* 579942	1	. Door Assembly/Installation, Cab	32	R13152	6	. Capscrew
10	231091	1	. Visor	33	00103339	13	. Flat Washer
11	203037	55'	. Molding, Locking Key	34	STD0250875	4	. Stud, Weld
12	200326	55'	. Molding	37	575151	1	. Decal
13	568622	3'	. Duct	38	259220	1	. Horn
14	* 578754	1	. Installation - Gas Spring	39	R1318360	2	. Stud, Weld
15	239161	1	. Fan	40	R13811191	2	. Locknut
16	219405	3'	. Wire	41	221767W	2	. Hard Washer
17	00109451	3	. Screw, Machine	43	18720W	19	. Capscrew
18	00103338	6	. Flat Washer	44	256556	1	. Switch, Proximity
19	00190637	3	. Nut, Esna	45	256557	1	. Actuator
20	* 585675	1	. Dome Light Assembly	46	256809	4	. Machine Screw
21	219435	4'	. Wire	47	234162	4	. Flat Washer
22	596831	1	. Plate, Horn Mounting	48	233051	1	. Terminal,Male
				49	200247	2	. Terminal Ring
				51	590105	1	. Cap
				52	ZZ00000502	4	. Insert

* See Separate Coverage


Cab Assembly

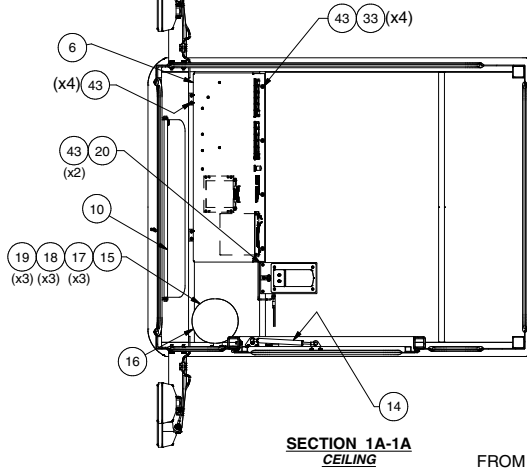


SECTION 1A-1A
CEILING

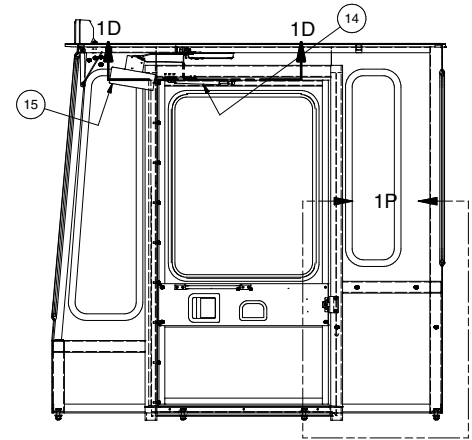


SECTION 1B-1B

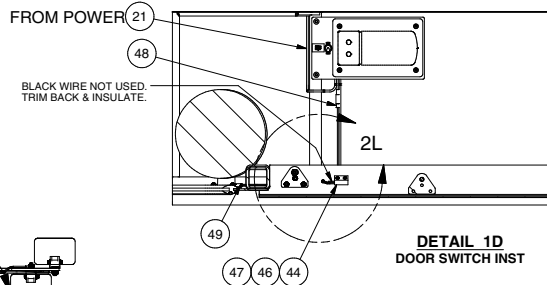


DETAIL 1D
DOOR SWITCH INST

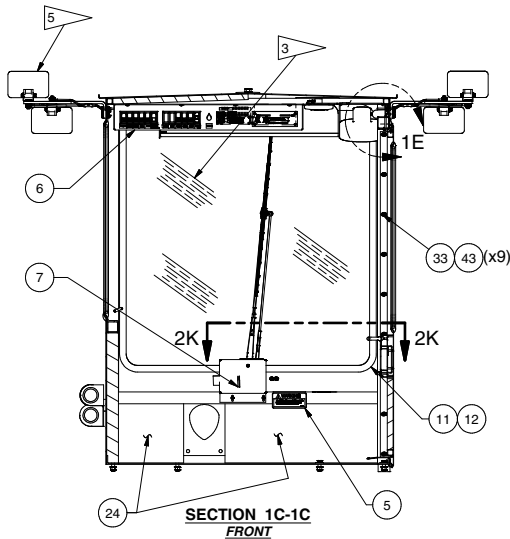

SECTION 1C-1C
FRONT

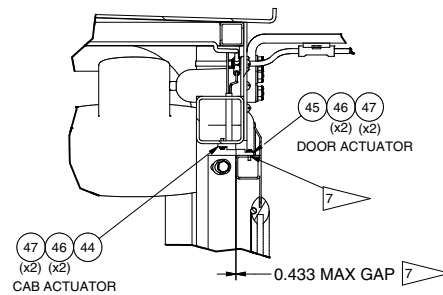

DETAIL 1E
DOOR SWITCH INSTALLATION

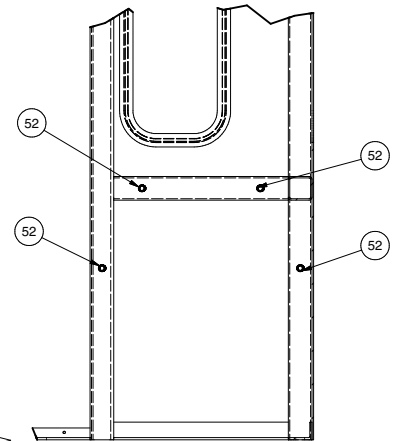

DETAIL 1P

NOTES:

- 1: INSERT CAPSCREWS UP FROM THE COWL FLOOR AT INSTALLATION.
- 2: INSTALL ITEM 11, WINDOW LOCKING CORD ON INSIDE OF CAB; LEAVE A 4"-6" OF ITEM 11 EXPOSED AT THE FRONT, LOWER CORNER OF THE WINDOW. CAP CORD END WITH ITEM 51 AND PLACE ITEM 37, EMERGENCY EXIT DECAL NEARBY.
- 3: SEE VEHICLE M/S FOR CAB GLASS OPTION.
- 4: WHEN MATING THE COWL ASS'Y TO THE CAB ASS'Y, SEAL THE JUNCTION BOX AND COWL TUNNEL TO THE REAR WALL OF THE CAB WITH "RTV" SILICONE SEALANT.
- 5: SEE VEHICLE M/S FOR LIGHTING OPTION GROUP.
- 6: INFORMATION IS PROVIDED FOR REWORK OF CAB SHOULD BOLT PATTERN NOT BE PRESENT. DRILL: Ø0.530, (4) PLACES AS SHOWN. INSTALL (4), P/N 222470, 1/4-20 UNC INSERTS. REFER TO VEHICLE M/S: HYD SYSTEM; BRAKES, FOR BRAKE PLATE INFORMATION.
- 7: LOCATE DOOR ACTUATOR, (CENTERED ON CAB ACTUATOR). DRILL & TAP: 4-40 NC-2B
8. ITEM 13 IS NOT SHOWN

This page is intentionally blank.

