

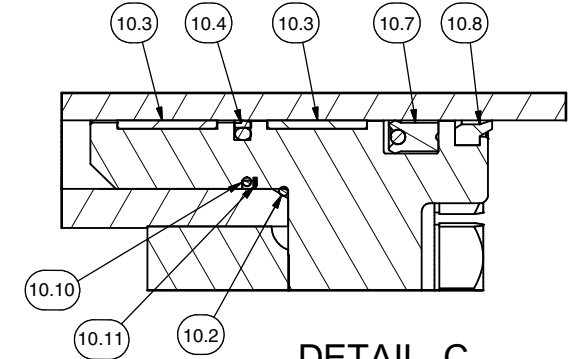


Cylinder Assembly, Hoist

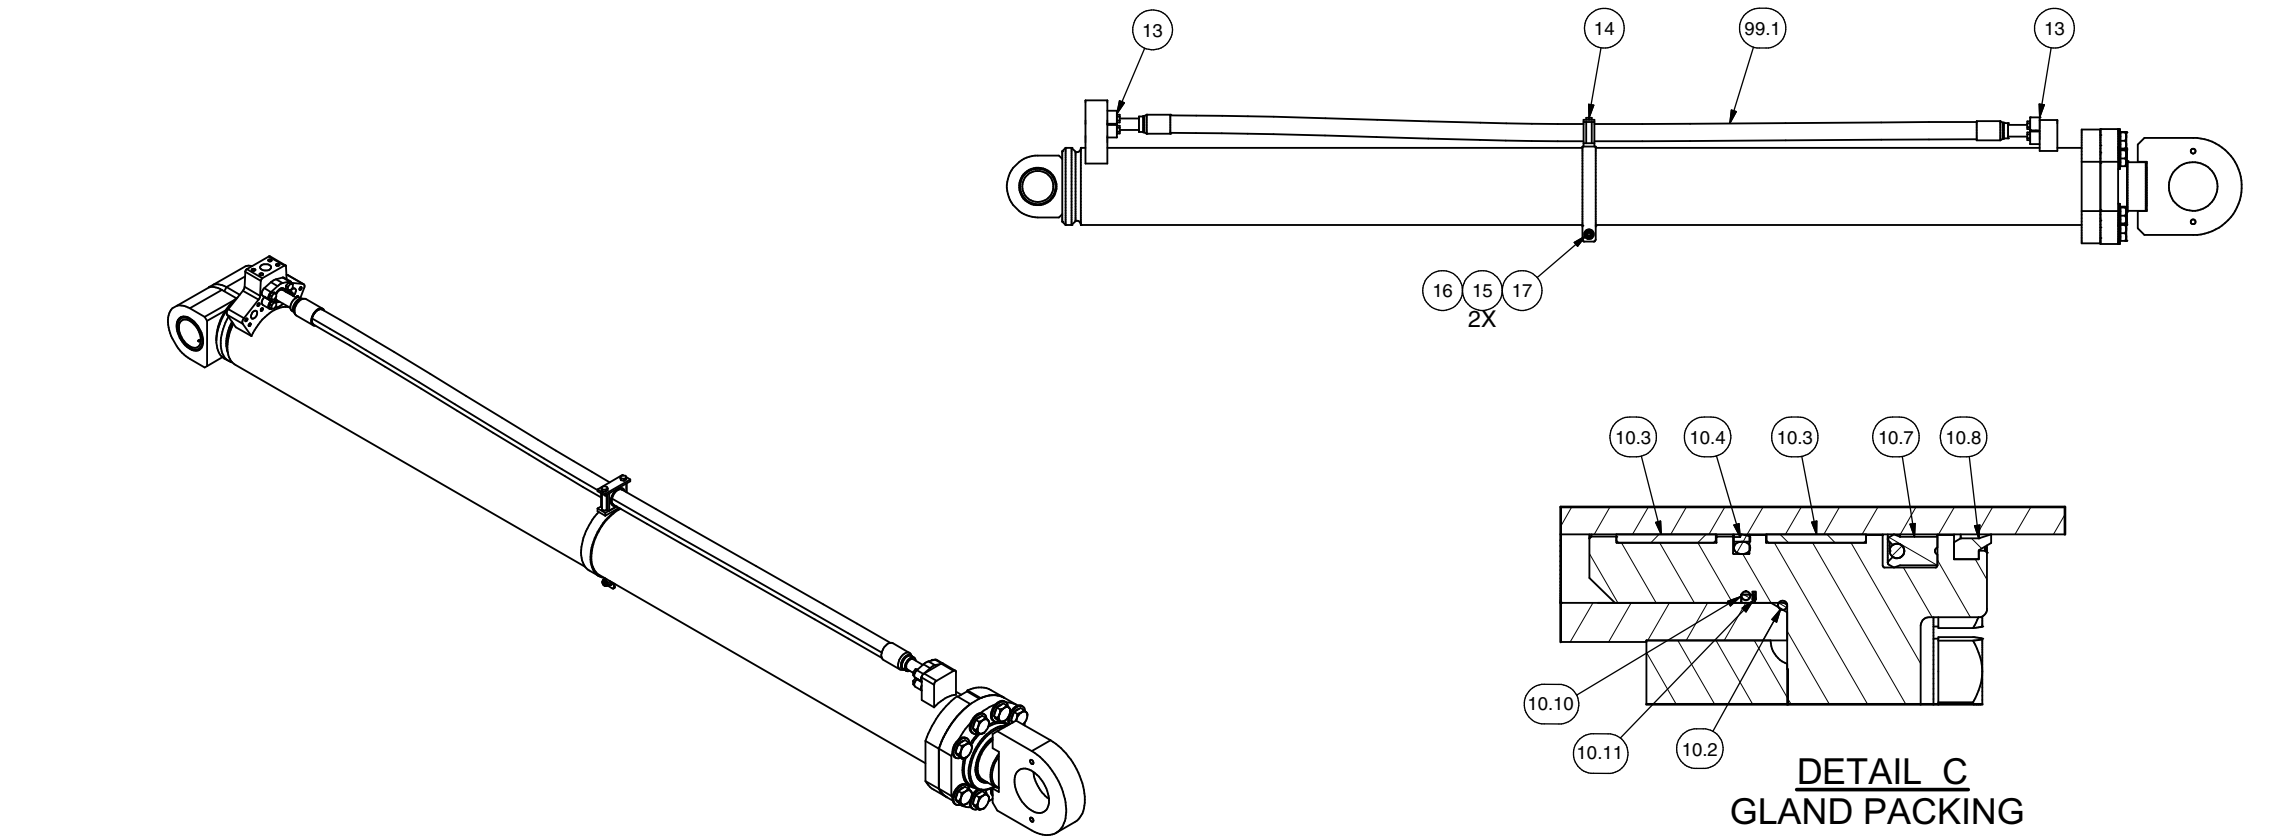

BARREL/ GLAND SEAL USE 10.10 AND 10.11
OR 10.2 NOT BOTH

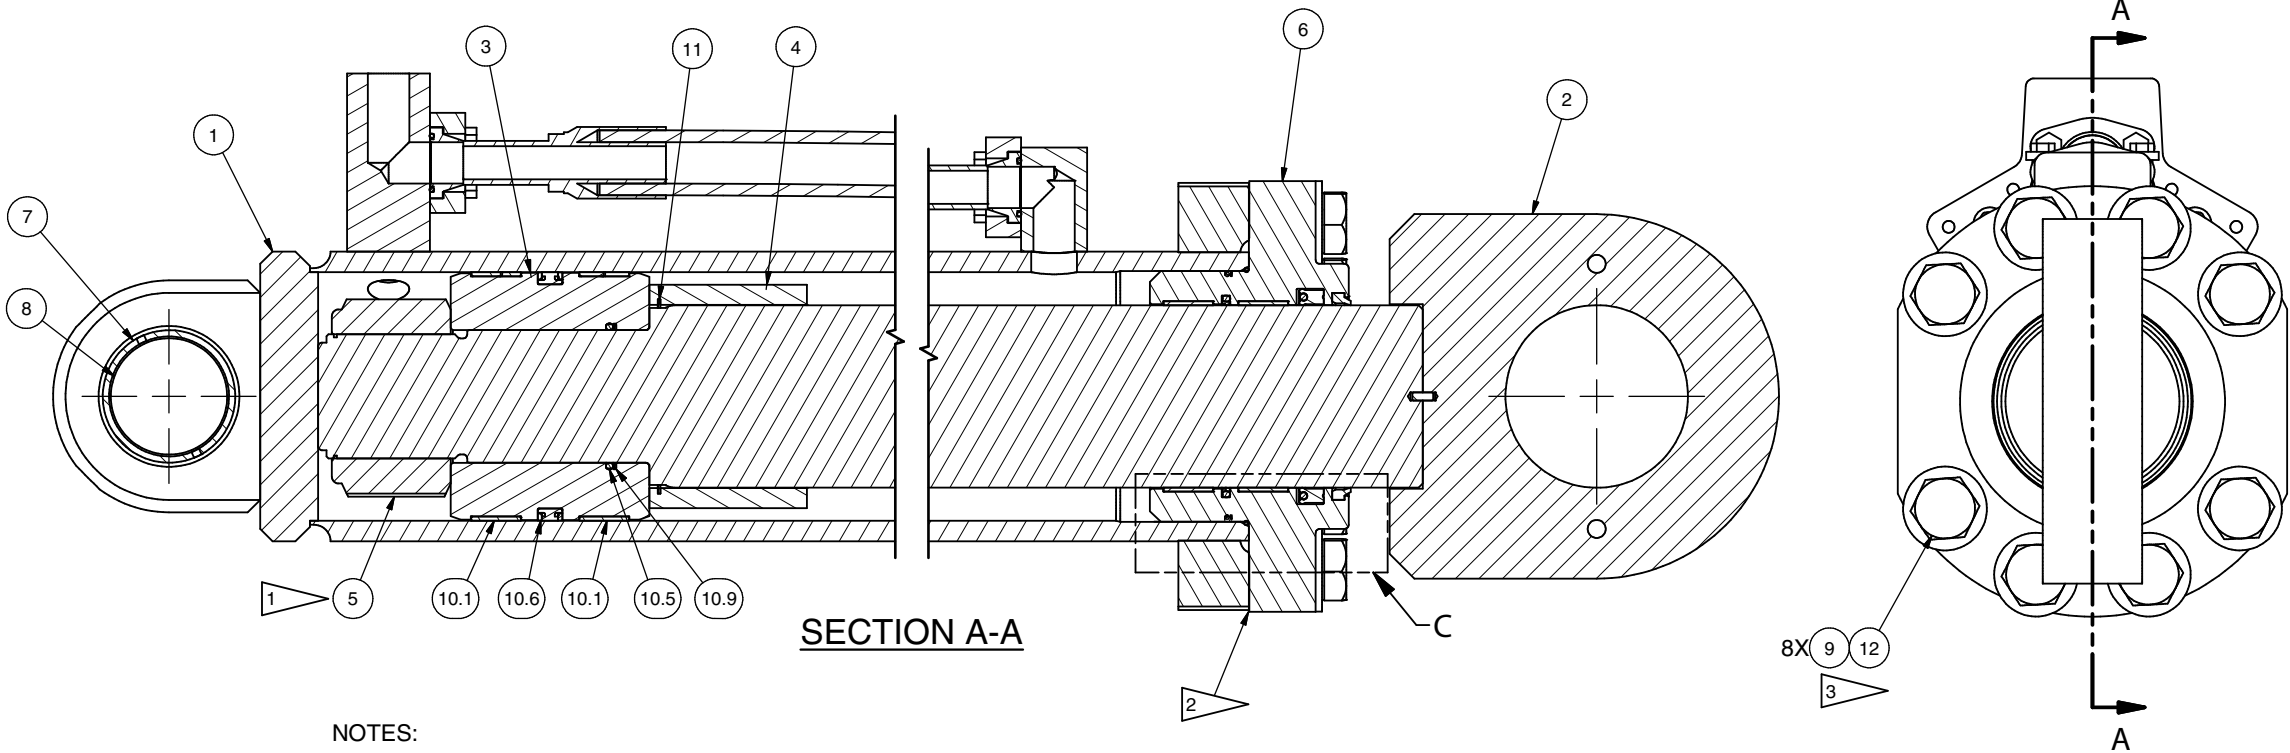

NOTES:

- 1 TORQUE TO 3,500 FT-LBS
- 2 REMOVE DIRT, LOOSE SCALE, BURRS, AND PAINT FROM THE MATING SURFACES OF THE BOLTED JOINT.
- 3 APPLY COPPER ANTI-SEIZE ASC P/N 244264 TO FASTENERS

Item	Part No.	Qty	Description
	601762		Cylinder Assembly, Hoist
1	601761	1	. Barrel
2	597858	1	. Stem
3	597872	1	. Piston, Cylinder
4	597873	1	. Spacer Cylinder
5	591445	1	. Locknut
6	597859	1	. Gland, Cylinder
7	597870	1	. Spacer, Bushing
8	597869	2	. Bushing
9	225851	8	. Washer
10	597890	1	. Kit, Packing
10.1	597895	2	. . Wear Ring, Piston
10.2	Y098629-264	1	. . O-Ring
10.3	597896	2	. . Wear Ring, Rod
10.4	69768.0550	1	. . Seal, Buffer
10.5	236596	1	. . O-Ring
10.6	69770.0750	1	. . Seal, Piston
10.7	Y437152.284	1	. . Seal
10.8	23569	1	. . Wiper Ring
10.9	Y076800-345	1	. . Backup Ring
10.10	R13802804	1	. . O-Ring
10.11	Y076800-263	1	. . Backup Ring
11	592273	1	. Ring - Snap, Internal
12	230260	8	. Capscrew
13	229449	2	. Kit, Split Flange
	203446	1	. . O-Ring
	225328	2	. . Clamp Half
	R13811077	4	. . Capscrew
14	599751	1	. Clamp
15	221771W	2	. Washer
16	221576W	1	. Capscrew
17	223587	1	. Locknut
99	599752	1	. Kit, Hose
99.1	599753	1	. . Hose Assembly