


LCB Bale Clamps with Cott-n-Ball™ Arms

- Cott-n-Ball arm design allows for easy tipping
- Clean, grease-free handling – no lubrication required
- Cott-n-Balls helps protect bale wrappers from tearing

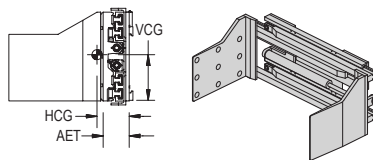

Non-Sideshifting Bale Clamps, 1 Function

Model Number	Capacity lb @ 24"	Opening Range (in)	Arm Size H x L (In)	Mounting Class	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
LCB-25NN-BB827	2,500	18.5–65.3	18 x 27	II	5.0	7.4	9.4	785
LCB-35NN-BB827	3,500	18.5–70.3	18 x 27	II	5.0	7.1	9.4	827
LCB-5GNN-BB827	5,000	19.0–91.8	18 x 27	II or III	5.5/6.5	5.7/6.7	9.6	1,184
LCB-5ENN-BB827	5,000	37.0–127.8	18 x 27	II or III	5.5/6.5	5.2/6.2	9.6	1,386

Sideshifting Bale Clamps, 2 Functions

LCB-25NS-BB827	2,500	18.5–65.3	18 x 27	II	5.0	7.4	9.4	785
LCB-35NS-BB827	3,500	18.5–70.3	18 x 27	II	5.0	7.1	9.4	827
LCB-5GNS-BB827	5,000	19.0–91.8	18 x 27	II or III	5.5	5.7	9.6	1,184
LCB-5ENS-BB827	5,000	37.0–127.8	18 x 27	II or III	5.5	5.2	9.6	1,386

Includes the hoses to connect a standard attachment to the hose terminal on the lift truck carriage.

Optional Mounting Hooks

	Description
Class II	Quick change hooks
Class III	Quick change hooks
Mounting other than shown, consult factory.	

Optional Equipment

- See Page E-31 for additional information.

Recommended Hydraulic Supply

Model Number	Flow (gpm)	Max psi
LCB-25/35/5G/5E	7-10	2,500
LCB-25RN thru LCB-5GRN	12	2,500
LCB-70RN	12	2,500
LCB-85RN	24	2,500

Hydraulic flow less than minimum may reduce operating speed and/or cause irregular arm movement. Higher flow may result in heat build-up, erratic operation and shortened hydraulic system life.

Installation Kits

Model Number	Number of Functions
YHJL-6-D-30	2
YHJL-8-D-30	

Includes the hoses to connect a standard attachment to the hose terminal on the lift truck carriage.

Cotton Bale Handling Capacity

Model Number	Max. Cap. (Bales)	Maximum Capacity (Bales)			
		Gin Flat	Gin Univ. & Gin Standard	Compress Univ. & Compress Std.	Compress HI-D
LCB-25	1	2	2	2	2
LCB-35	1	2	3	2	3
LCB-50	2	2	3	2	3
LCB-5G	1	3	4	3	4
LCB-5E	2	4	5	4	4
LCB-7A	2	8	8	8	8
LCB-70/LCB-85	2	6	6	6	6
NSQ20DD	N/A	16	24	20	20

Minimum Truck Carriage Width

Model Number	Body Width (in)	Minimum Truck Carriage Width (in)
LCB-25	36	30
LCB-25RN	36	29
LCB-35	41	35
LCB-35RN	41	29
LCB-5G	62	32.5
LCB-5GRN	62	33
LCB-5E	68	39
LCB-50RN	41	33
LCB-70	50	39
LCB-70/85RN ITA III	50	36
LCB-70/85 ITA IV	50	38