


Long Reach Push/Pulls

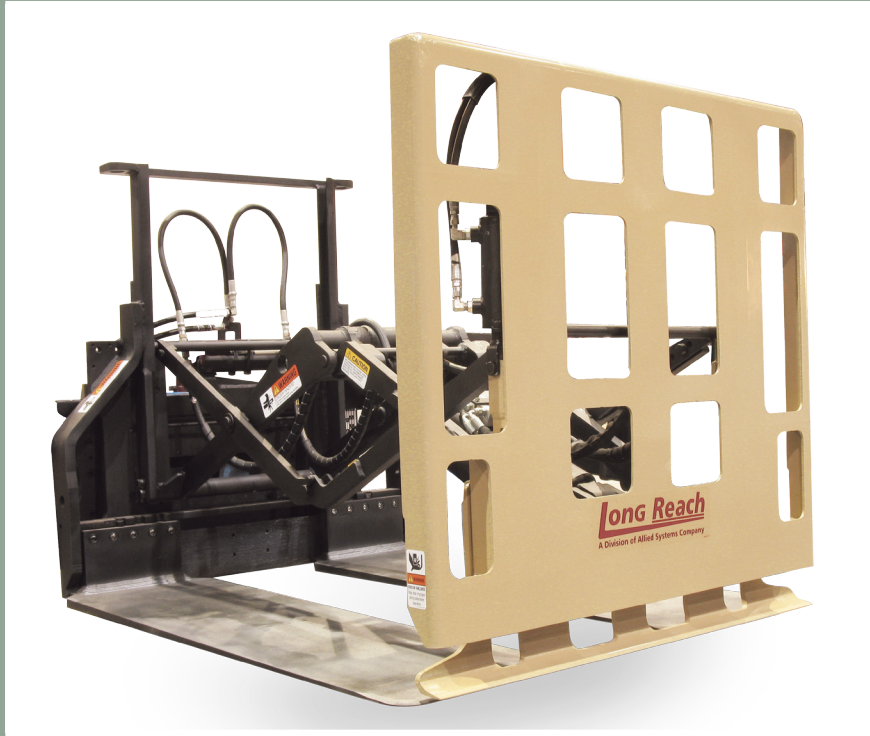

Long Reach push/pulls facilitate replacing pallets with slipsheets, to save money and space in warehouse/distribution operations.

Dedicated, fork mounted, or designed to handle both slipsheets and a variety of popular pallets, Long Reach push/pull attachments provide valuable versatility in warehouse/distribution operations. Optional sideshifting capability allows trucks to maneuver more easily in narrow rail cars and trailers.

Flexibility

- Bolt-on options allow easy conversion from Class II to Class III mounting, providing flexibility for rental fleets and large scale users
- Two-position field-adjustable faceplate angle requires only four bolts to change

No-fuss Maintenance

- No-lube mechanism and faceplate keeps the load clean
- Single push/pull cylinder means less maintenance

Features

- Lighter weight to maximize your truck capacity
- One of the highest pull forces in the industry
- Excellent visibility
- Superior pantograph style mechanism

Options

- Custom designs to suit your application
- Sideshift
- Mark 55 version
- Fork mount
- Hydraulically-positionable platens
- Faceplate stop

PLFB/LPFB Fork-Mounted Push/Pull & Load Push Models


- ◆ Easily mounts to truck forks
- ◆ Rugged welded steel design
- ◆ Linkage mechanism requires no lubrication

Fork-Mounted Push/Pull, 1 Function

Model Number	Capacity lb @ 24"	Platen Size, W x L (in)	Platen Out-to-Out (in)	Mounting Class	Lost Load AET (in)	HCG (in)	VCG (in)	Weight (lb)
PLFB-36NMPA840	3,600	18 x 40	40 or 46	II/III	8.2	10.1	12.2	850
PLFB-36NMPA548		15 x 48	34 or 40			10.8	12.2	850
PLFB-36NMPA848		18 x 48	40 or 46			11.6	11.7	885
PLFB-48NMPB840	4,800	18 x 40	40 or 46	II/III	8.2	10.1	12.2	850
PLFB-48NMPB548		15 x 48	34 or 40			10.8	12.2	850
PLFB-48NMPB848		18 x 48	40 or 46			11.6	11.7	885

Fork-Mounted Load Push, 1 Function

LPFB-36NMPA840	3,600	18 x 40	40 or 46	II/III	8.2	10.6	12.8	770
LPFB-36NMPA548		15 x 48	34 or 40			11.3	12.8	770
LPFB-36NMPA848		18 x 48	40 or 46			12.1	12.3	805
LPFB-48NMPB840	4,800	18 x 40	40 or 46	II/III	8.2	10.6	12.8	770
LPFB-48NMPB548		15 x 48	34 or 40			11.3	12.8	770
LPFB-48NMPB848		18 x 48	40 or 46			12.1	12.3	805

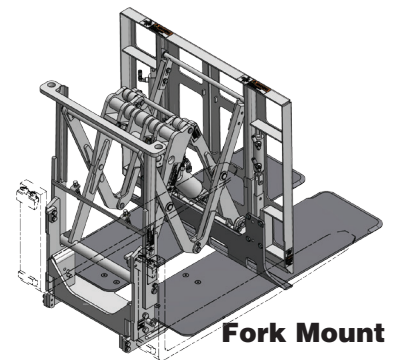


Fork Mount

PLPB 36/48 Series Push/Pulls

- ◆ Rugged welded steel design
- ◆ Easy Class II/III mounting conversion
- ◆ Bolt-on options add flexibility
- ◆ Linkage mechanism requires no lubrication

Non-Sideshifting with Manually Adjustable Platens, 1 Function


Model Number	Capacity lb @ 24"	Platen Size, W x L (in)	Platen Out-to-Out (in)	Mounting Class	Lost Load AET (in.)	HCG (in)	VCG (in)	Weight (lb)
PLPB-36NMPA548	3,600	15 x 48	34-42	II	6.7	8.3	10.7	1,105
PLPB-36NMPA848		18 x 48	37-45			9.2	10.1	1,155
PLPB-48NMPB548	4,800	15 x 48	34-42	II	6.7	8.6	10.3	1,134
PLPB-48NMPB848		18 x 48	37-45			9.5	9.8	1,190
PLPB-48NMPB548		15 x 48	34-42	III		8.6	10.3	1,155
PLPB-48NMPB848		18 x 48	37-45			9.5	9.8	1,210

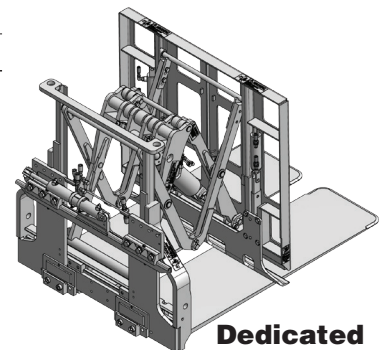

Dedicated

Sideshifting with Manually Adjustable Platens, 2 Functions

PLPB-36SMPA548	3,600	15 x 48	34-42	II	6.7	8.3	10.7	1,115	
PLPB-36SMPA848		18 x 48	37-45			9.2	10.1	1,165	
PLPB-48SMPB548	4,800	15 x 48	34-42	II	6.7	8.6	10.3	1,145	
PLPB-48SMPB848		18 x 48	37-45			9.5	9.8	1,200	
PLPB-48SMPB548		15 x 48	34-42	III		8.6	10.3	1,165	
PLPB-48SMPB848		18 x 48	37-45			9.5	9.8	1,220	

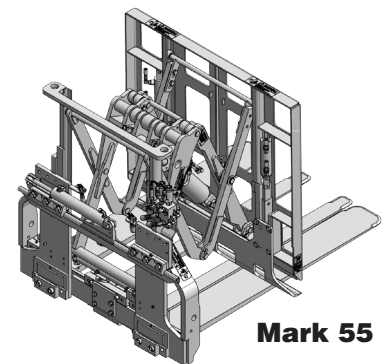

Mark 55

Mark 55 Series Push/Pulls

- ◆ Handles slipsheeted loads and standard Chop Mark 55 pallets, GMA, Europallets, and many others
- ◆ Hydraulically positioned outer platens, fixed inner platens
- ◆ ITA Class II or III mounting - easily convertible

Model Number	Capacity lb @ 24"	Platen Size, Inner W x L (in)	Platen Size, Outer W x L (in)	Mounting Class	Lost Load AET (in.)	HCG (in)	VCG (in)	Weight (lb)
PLHB-36SFPC748	3,600	3 x 48	7 x 48	II	6.7	7.5	11.2	1,115
PLHB-48SFPC748	4,800	3 x 48	7 x 48	III	6.7	7.5	10.8	1,145

Note: Requires two (2) auxiliary truck functions. Circuit selector valve included on units as standard. Circuit selector requires electrical power.

Other models available; contact factory for more information. Specifications subject to change without notice.

Choose Long Reach for serviceability, value, and custom design

Multi-Pallet Handlers
Fork Positioners
Integral Carriages
Paper Roll Clamps
Lateral Clamps

Carton Clamps
Push-Pulls
Rotators
Custom Design

21433 SW Oregon Street
Sherwood, Oregon 97140-9799 USA
Toll free: (800) 285-7000
Phone: (503) 625-2560
Fax: (503) 625-7269
Email: marketing@alliedsystems.com
www.alliedsystems.com/Longreach

LONG REACH®
A Division of Allied Systems Company