


Cab Assembly

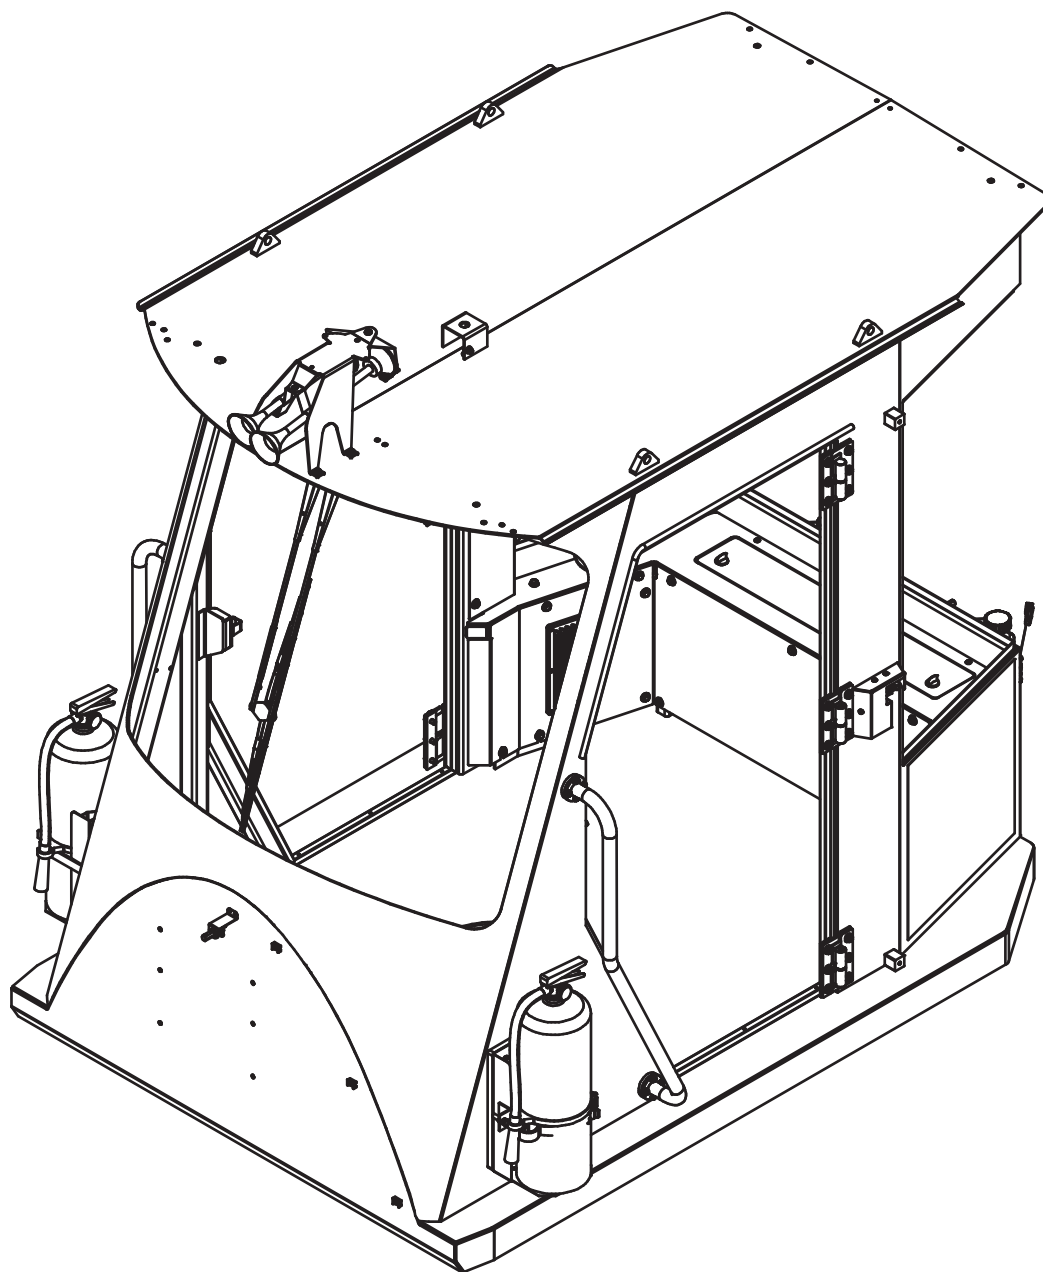





NOTES:

- 2: ITEM 73 (CAM LATCH ARM) MAY HAVE TO BE SHORTENED SLIGHTLY FOR CLEAR SWEEP.
- 3: (OPTIONAL TRAINING SEAT) CAN BE INSTALLED ON EITHER THE LH OR RH SIDE OF THE CAB IN THE SAME MANNER.
- 4: WIPER BLADE IS OFFSET, POSITION LONG END UP TO PREVENT BOTTOM FROM TRAVELING OFF THE BOTTOM OF THE FRONT WINDOW.
- 5: DOOR CLEARANCE SHOULD BE UNIFORM ALL THE WAY AROUND; APPROXIMATE CLEARANCE IS 0.13". INSTALL LOWER 2 HINGES AND POSITION DOOR WITHIN OPENING AS NOTED. INSTALL TOP HINGE TO LOCK DOOR ASSEMBLY ONTO CAB. APPLY NEVER SEIZE AND TORQUE TO 27 FT-LBS MAX.
- 6: USE ITEM 21 (NUT) TO SECURE ITEMS 43 (WASHER) & 44 (SHAFT) IN ITEM 41 (HOUSING). ITEM 43 (WASHER) HAS A GREY SIDE, AND A SILVER SIDE. THE GREY SIDE IS THE THRUST FACE, AND SHOULD BE AGAINST THE SURFACE OF ITEM 41 (HOUSING) ON BOTH SIDES OF ITEM 41 (HOUSING). DO NOT OVERTIGHTEN, SHAFT SHOULD ROTATE WITH SLIGHT RESISTANCE TO MOTION. TIGHTEN ITEM 12 (SHAFT) AGAINST ITEM 21 (NUT). APPLY BLUE 242 LOC-TITE TO ITEMS 12 & 44.
- 7: ITEM 42 (LEVER) CAN BE INSTALLED AFTER ITEMS 4 & 9 (RH & LH COVERS) HAVE BEEN INSTALLED.
- 8:
- 9: IF ADJUSTMENT REQUIRED, USE FENDER WASHERS TO ADJUST SO THAT THE CUSHION IS SLIGHTLY COMPRESSED 1/8" - 1/4" WITH THE DOOR IN THE LOCKED BACK POSITION.
- 10:
- 11: ANTENNA OF ITEM 138 MOUNTS TO TOP OF CAB. ROUTE CABLE THROUGH VINYL CLAMP, THROUGH HOLE IN CAB ROOF, THROUGH HOLE IN CAB FRONT, DOWN LEFT SIDE CABLE CHANNEL. WHEN ROUTING CABLE ALLOW TO DROOP SLIGHTLY BELOW CAB ENTERANCE TO REVENT WATER FROM FOLLOWING WIRES INTO CAB.
- 12:
- 13: BLACK HARDWARE USED IN SOME LOCATIONS IN AN ATTEMPT TO MAKE ALL VISIBLE HARDWARE INSIDE OF CAB BLACK.
- 14: ** APPLY ITEM 135 TO ALL OPENINGS AND GAPS ASSOCIATED WITH GROMMETS AND OTHER PASS THROUGHS INTO THE CAB THROUGH THE ROOF & CAB SIDES.
- 15: ITEM NOT SHOWN: ITEM 2, ITEM 6, ITEM 129, ITEM 130, ITEM 141, ITEM 144.


Cab Assembly

Item	Part No.	Qty	Description	Item	Part No.	Qty	Description
	597641		Cab Assembly				
1	597860	1	. Cab Weldment	94	R13803445	2	. Locknut
2	* 596442	1	. Installation, Window	95	596491	2	. Machine Screw
4	590618	1	. Cover Plate	101	224120W	5	. Capscrew
6	596572	1	. Wire Loom - Cab	103	R13811034	36	. Capscrew
7	258712	2	. Pin, Striker	105	221767W	54	. Hard Washer
8	258713	2	. Guard, Striker	106	00103340	43	. Flat Washer
9	590619	1	. Cover Plate	109	201598	43	. Capscrew
12	587033	2	. Shaft, Stand-Off	119	Y25G-0414	8	. Capscrew
16	259262	4	. Jam Nut	126	R13801807	4	. Capscrew
17	259263	8	. Machine Screw	129	* 598508	1	. Installation, Insulation
18	259264	8	. Nut, Esna	130	* 596486	1	. Installation, Insulation
19	296148W	8	. Capscrew	131	296418W	4	. Hard Washer
20	320152W	8	. Washer	134	R13803026	5	. Clip, Insulted
21	587034	2	. Jam Nut	135	222761	1	. Sealer
22	590724	2	. Motor, Wiper	137	* 590951	1	. Horn Installation
23	258773	1	. Arm Assy, Wiper	141	242601	30	. Cable Tie
24	258774	2	. Blade Assy, Wiper	143	598746	2	. Wire Harness
25	258434	4	. Spacer	144	593346	30	. Mount, Blk
27	587119	1	. Arm Assy, Wiper	145	593629	1	. Stud
31	249776	2	. Nozzle, Jet, Single	147	593658	1	. Spring, Ext
35	* 586558	3	. Hinge Assy	148	258668	2	. Vent, Louvered
36	* 586560	3	. Hinge Assy	149	R13805587	12	. Screw
37	586583	12	. Pad, Hinge	151	00103339	2	. Flat Washer
38	R13810990	16	. Capscrew	152	00103341	4	. Flat Washer
40	2301055W	10'	. Trim (Per Ft)	153	R13812212	4	. Flat Washer
41	258919	2	. Housing, Brg	154	596368	2	. Hook, Coat
42	258920	2	. Lever, Clamp	155	246037	1	. Threadlock (Bottle)
43	258921	4	. Washer, Thrust	156	R13810989	8	. Capscrew
44	258922	2	. Shaft, Flanged	157	595326	3	. Mount, Tack
45	258923	2	. Latch, LH Rotary	158	230839	1	. Connector, Cord
47	258925	1	. Spring, Ext	159	212052	2	. Fire Extinguisher
48	258926	4	. Clevis	160	212209	2	. Bracket, Mounting
49	258928	1	. Stud	161	162572W	12	. Capscrew
50	586559	2	. Plate, Arm	162	597926	1	. Plate, Beauty Panel
51	593626	1	. Latch Weldment, Holdback	163	597996	1	. Plate, LH Side Cover
52	593340	1	. Plate, RH Holdback Cover	164	597997	1	. Plate, RH Side Cover
53	593628	1	. Plate, LH Cover	165	590235	2	. Plate, Mounting
54	593339	1	. Holdback Latch Weldment, RH	166	598059	1	. Plate, Mounting Bracket
56	R6515575	2	. Clamp	167	598058	1	. Plate, Mounting Bracket
57	* 598275	2	. Bottle, Washer	168	R13812831	6	. Capscrew
58	215774	2	. Mirror, Convex	169	Y25G-0410	2	. Capscrew
59	526939	2	. Bracket	170	587608	1	. Decal, Trans Operation
60	596495	2	. Machine Screw	171	557341	1	. Decal, Warning: Read Ops Man
66	597922	1	. Plate, Panel Rear	172	592855	1	. Decal, Wheel Nuts
67	596468	1	. Plate, Panel Rear - RH	173	504204	1	. Decal, Caution, Do Not Reverse...
68	596467	1	. Plate, Panel Rear - LH	174	587028	1	. Nameplate, Load Capacity
69	590698	1	. Weldment, Panel - Fnt	175	1321665W	1	. Decal, Warning
72	597904	1	. Cover, Storage Comp Weldment	176	223061	1	. Decal, Warning Voltage
73	258860	2	. Cam Latch Assy	177	586693	1	. Nameplate
90	R13811189	9	. Locknut	178	593905	2	. Decal, Logger W/Log
91	221763W	44	. Hard Washer				
92	Y25G-0406	12	. Capscrew				


* See Separate Coverage

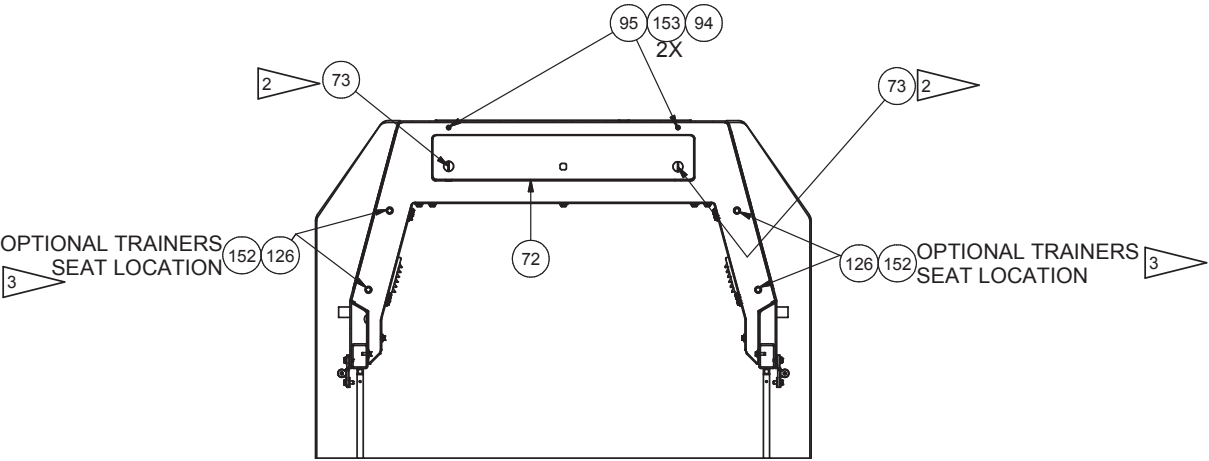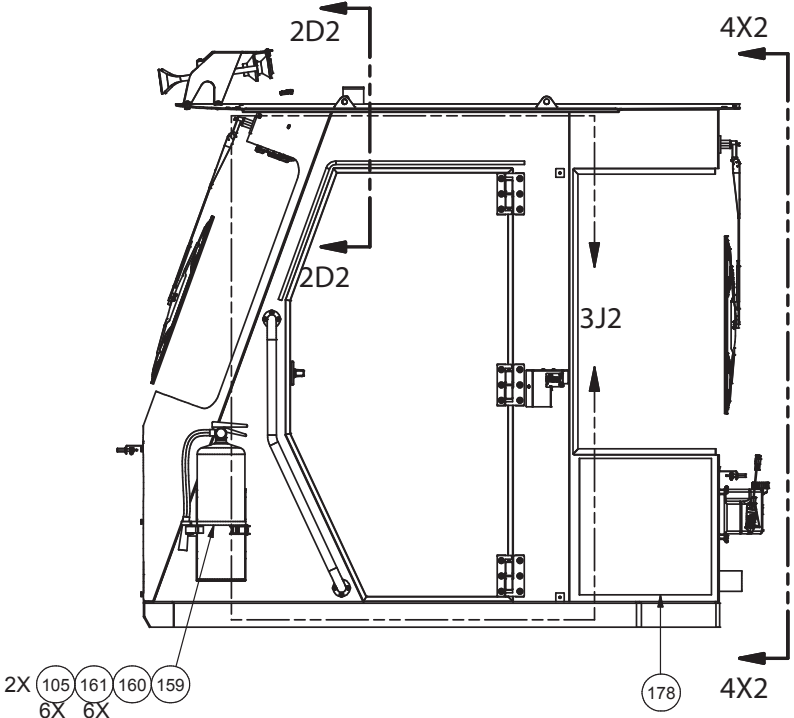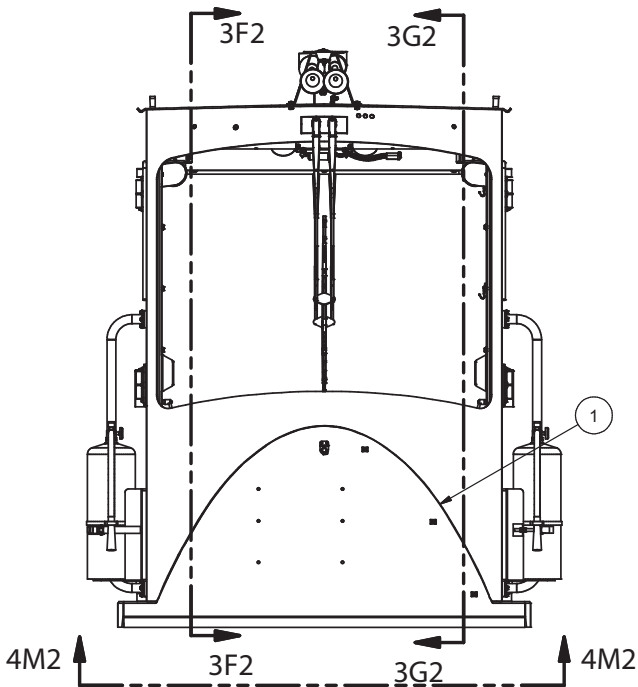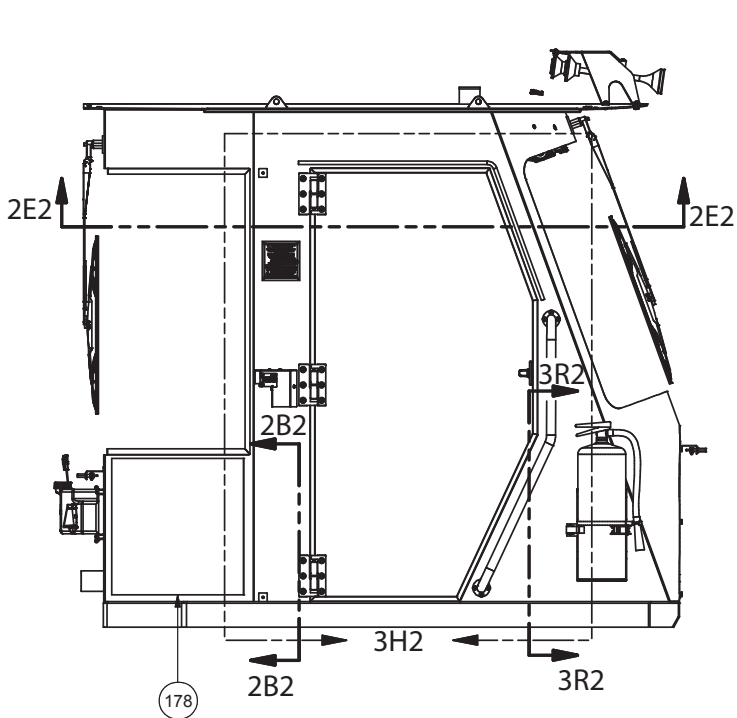


SECTION 2A2-2A2

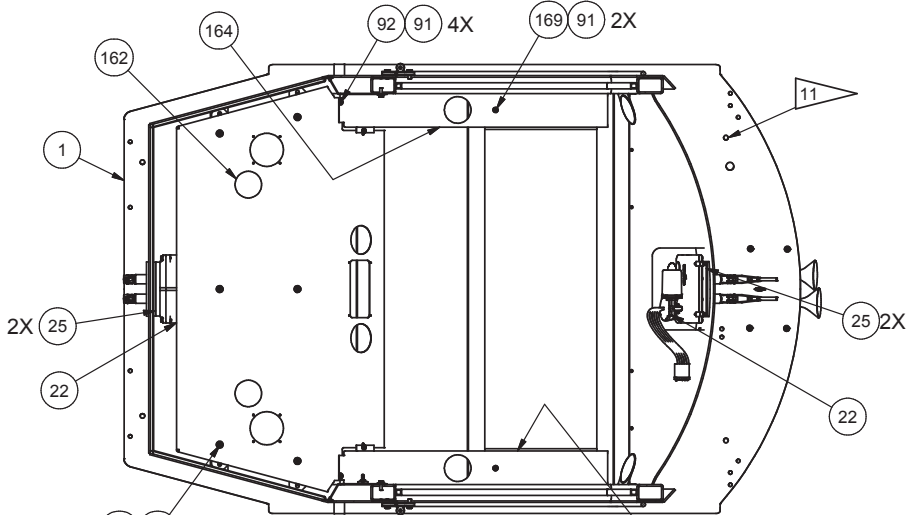


SECTION 2E2-2E2
OVERHEAD CONSOLE
CALLED OUT IN THE CAB ELECTRICAL

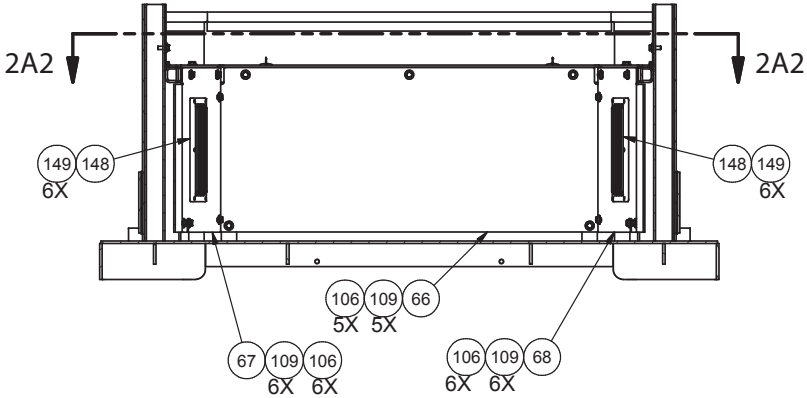

SECTION 2B2-2B2

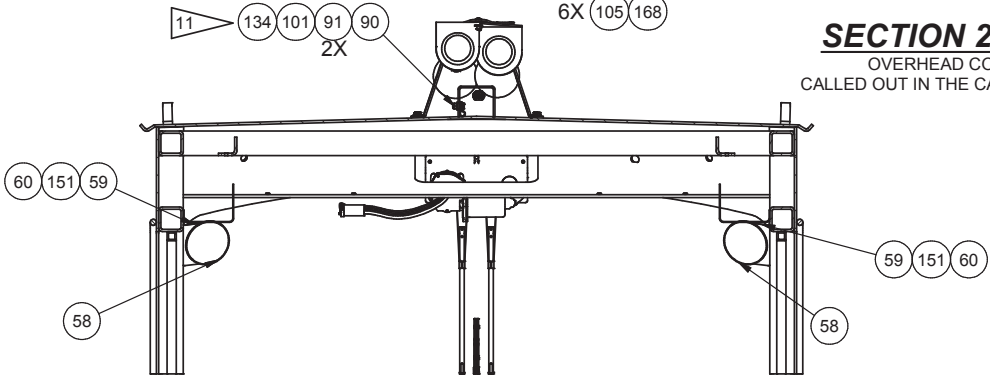


SECTION 2D2-2D2

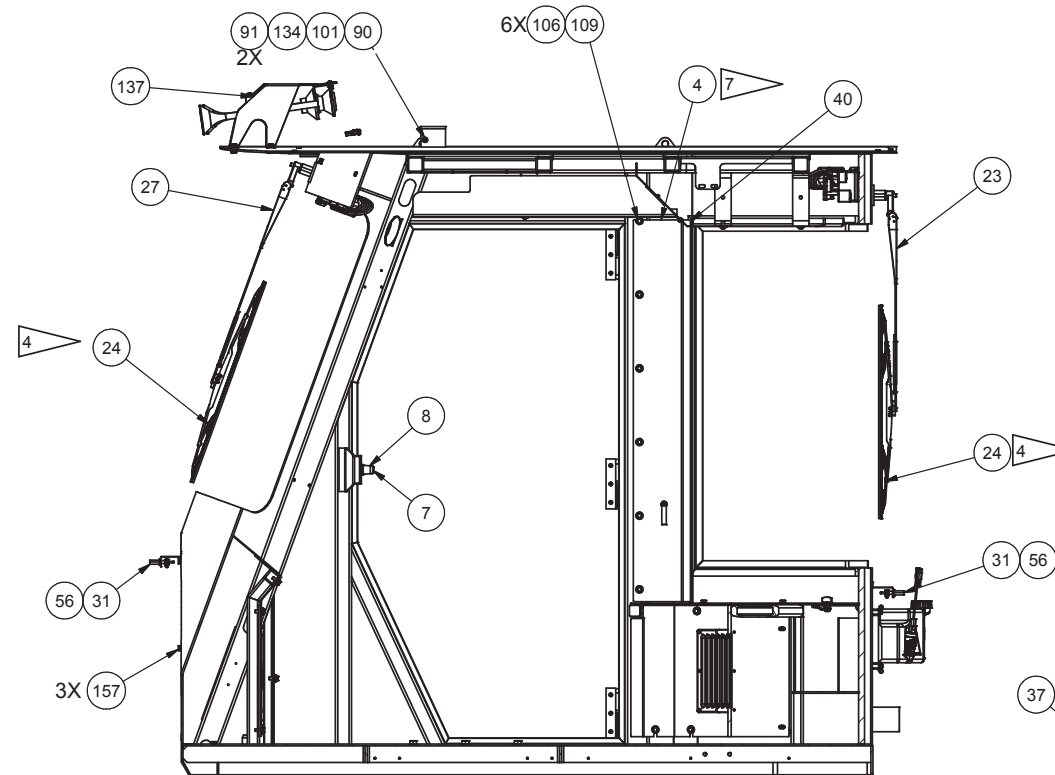

SECTION 3G2-3G2

HINGE ASSY

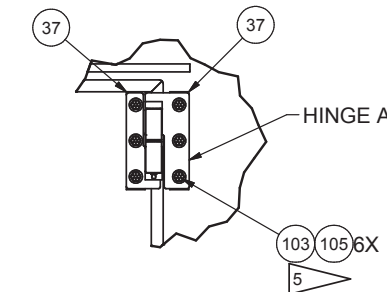

Technical drawing of a window frame assembly, showing various components and their reference numbers:

- 177: Window handle/lock mechanism.
- 36: Top hinge assembly.
- 5: Top hinge pin.
- 4W3: Window frame assembly (indicated by a dashed circle).
- 52: Window frame assembly (indicated by a dashed circle).
- 35: Bottom hinge assembly.
- 5: Bottom hinge pin.

[illegible]

Rev: 01/2018
A Page 4 of 5
5 9 7 6 4 1

